

Evaluating the Techno-Economics of Retrofitting CO₂ Capture Technologies in an Integrated Oil Refinery

(Progress Report)

Stanley Santos

IEA Greenhouse Gas R&D Programme

Industry CCS Workshop

Vienna, Austria

28th April 2014

IEAGHG Activities on CCS in the Oil Refining Sector



- *Initiated the study to evaluate the Techno-Economics of Retrofitting CO₂ Capture in an Oil Refining Sector.*
- *Project Partners*
 - GASSNOVA (CLIMIT Programme)
 - CONCAWE
 - Shell
- *Cost of the Project*
 - Total: ~ £850,000
 - IEAGHG: ~ £180,000 (Cash & In-Kind)

Outline of the Presentations



- *Purpose of the Presentation*
 - To present the outline of the work plans for the oil refining study
- *Oil Refining Sector Overview*
 - What are the important considerations
 - CO₂ Point Sources from Oil Refineries
- *Capture Technology Overview*
 - Post-Combustion
 - Pre-Combustion
 - Oxyfuel Combustion
- *Scope of the Work*
- *Recommendations*
- *To thank CONCAWE in providing data & information*

World Oil Refining Sector



- ***In 2012, the global consumption of petroleum products reached nearly ~90 million bbl/d.***

- ***Top 10 Countries***


- USA 17.38 mbbbl/d
- China 11.54 mbbbl/d
- Russia 5.75 mbbbl/d
- Japan 4.25 mbbbl/d
- India 4.21 mbbbl/d
- S. Korea 2.88 mbbbl/d
- Italy 2.20 mbbbl/d
- S. Arabia 2.12 mbbbl/d
- Germany 2.09 mbbbl/d
- Canada 2.06 mbbbl/d



Overview of Refining Crude Oil




- The only common processing unit among all the integrated refinery is the atmospheric distillation.***

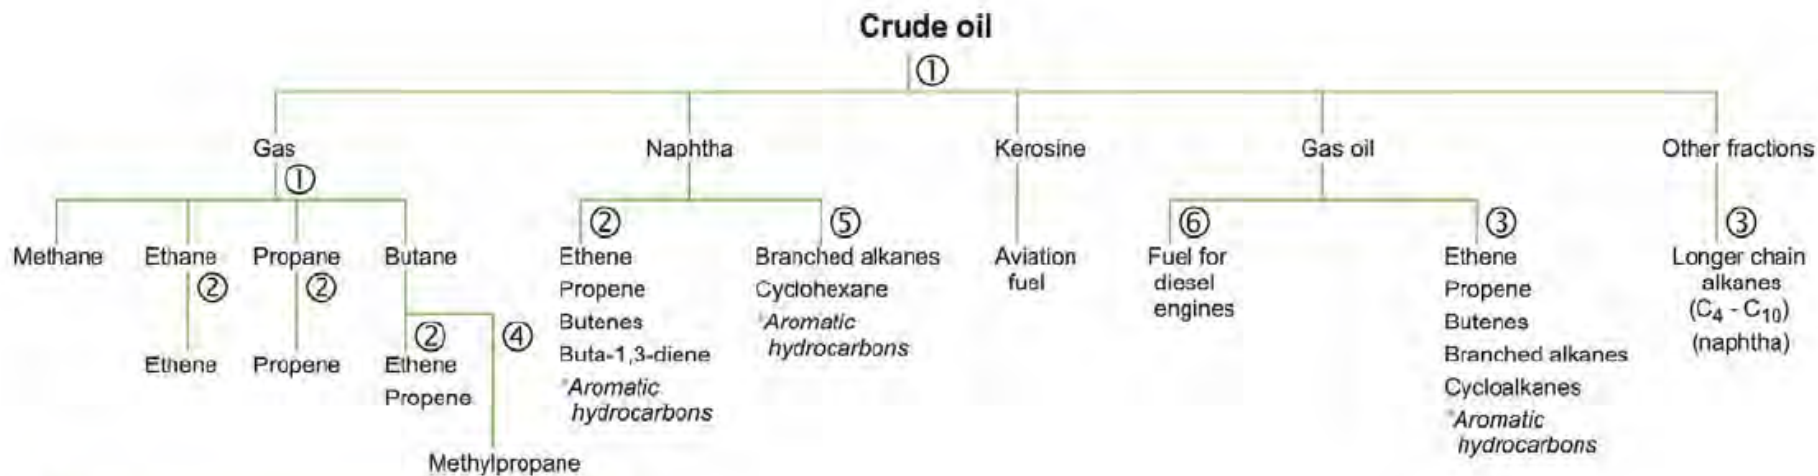


- ① Distillation
- ② Steam cracking
- ③ Catalytic cracking ('hydrocracking')
- ④ Isomerisation
- ⑤ Reforming ('platforming')
- ⑥ Sulfur is removed

**Aromatic hydrocarbons:*
 benzene
 methylbenzene
 dimethylbenzenes
 ethylbenzene


Basic Refining Concepts

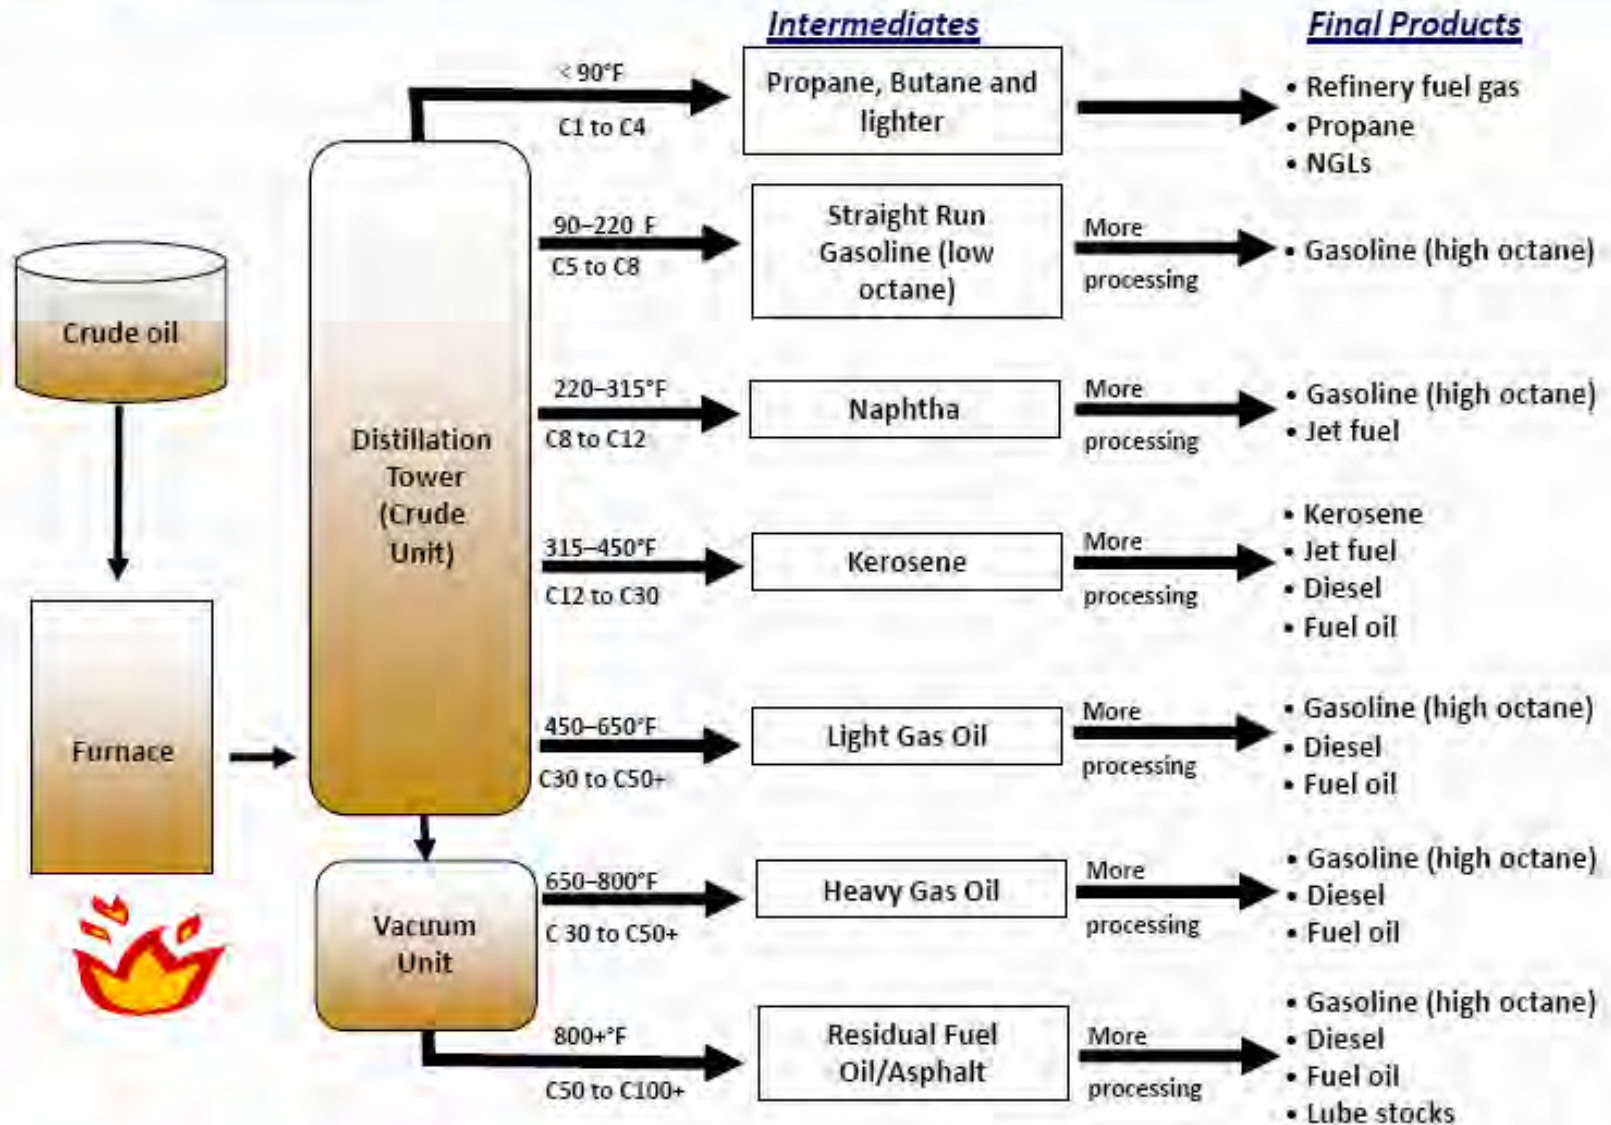

Feedstock Variation

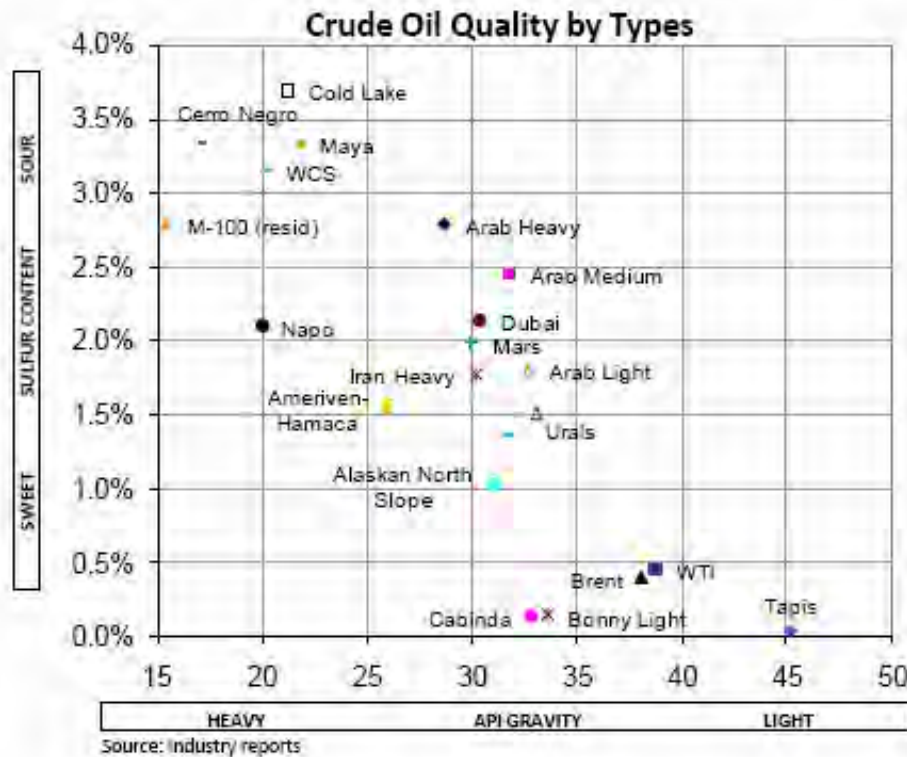



Estimated Quality of Reserves (2009)

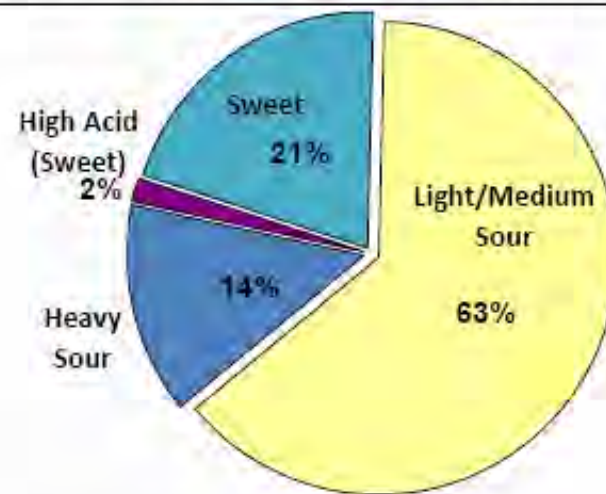

Source: DOE, Oil & Gas Journal, Company Information


Data from Valero 2010

Product Quality Requirements

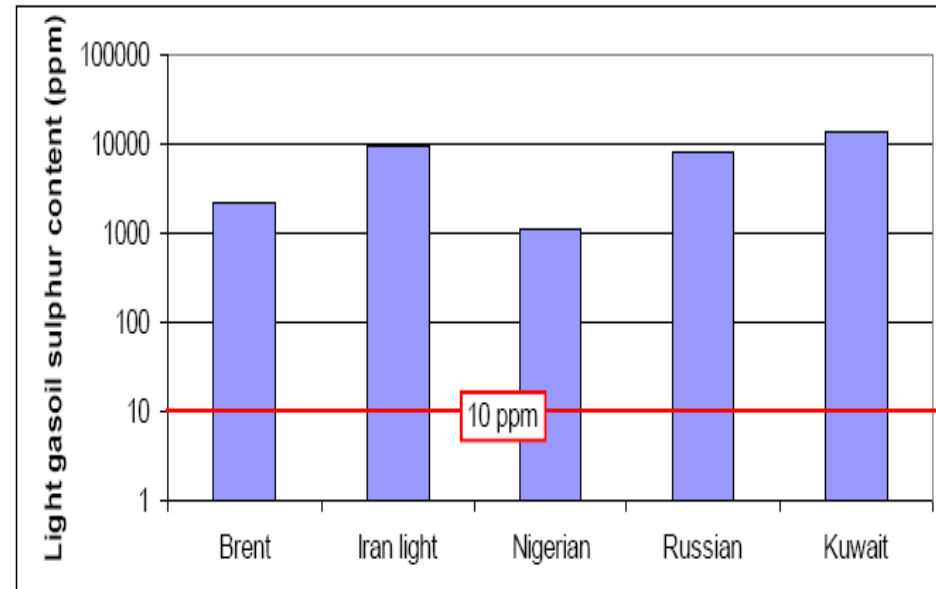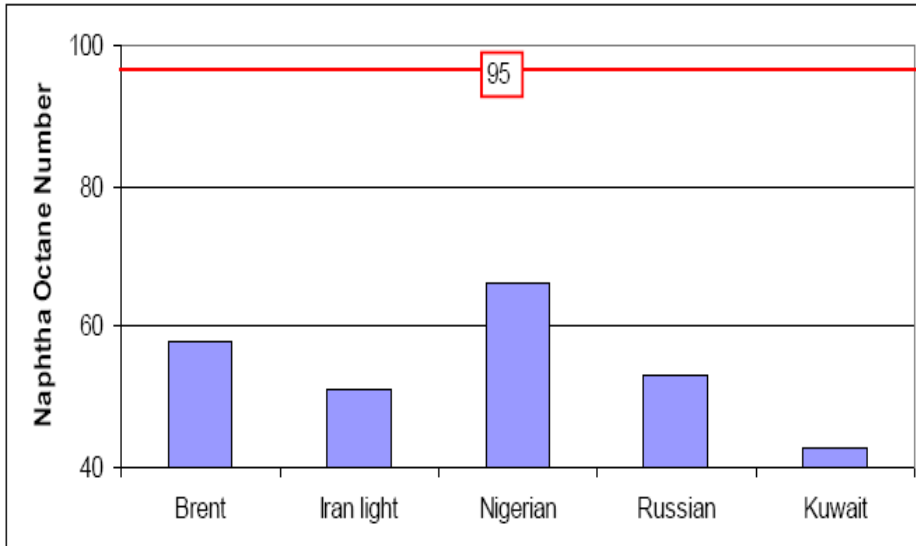


Data from CONCAWE 2011

Hydroskimming/Topping Refinery

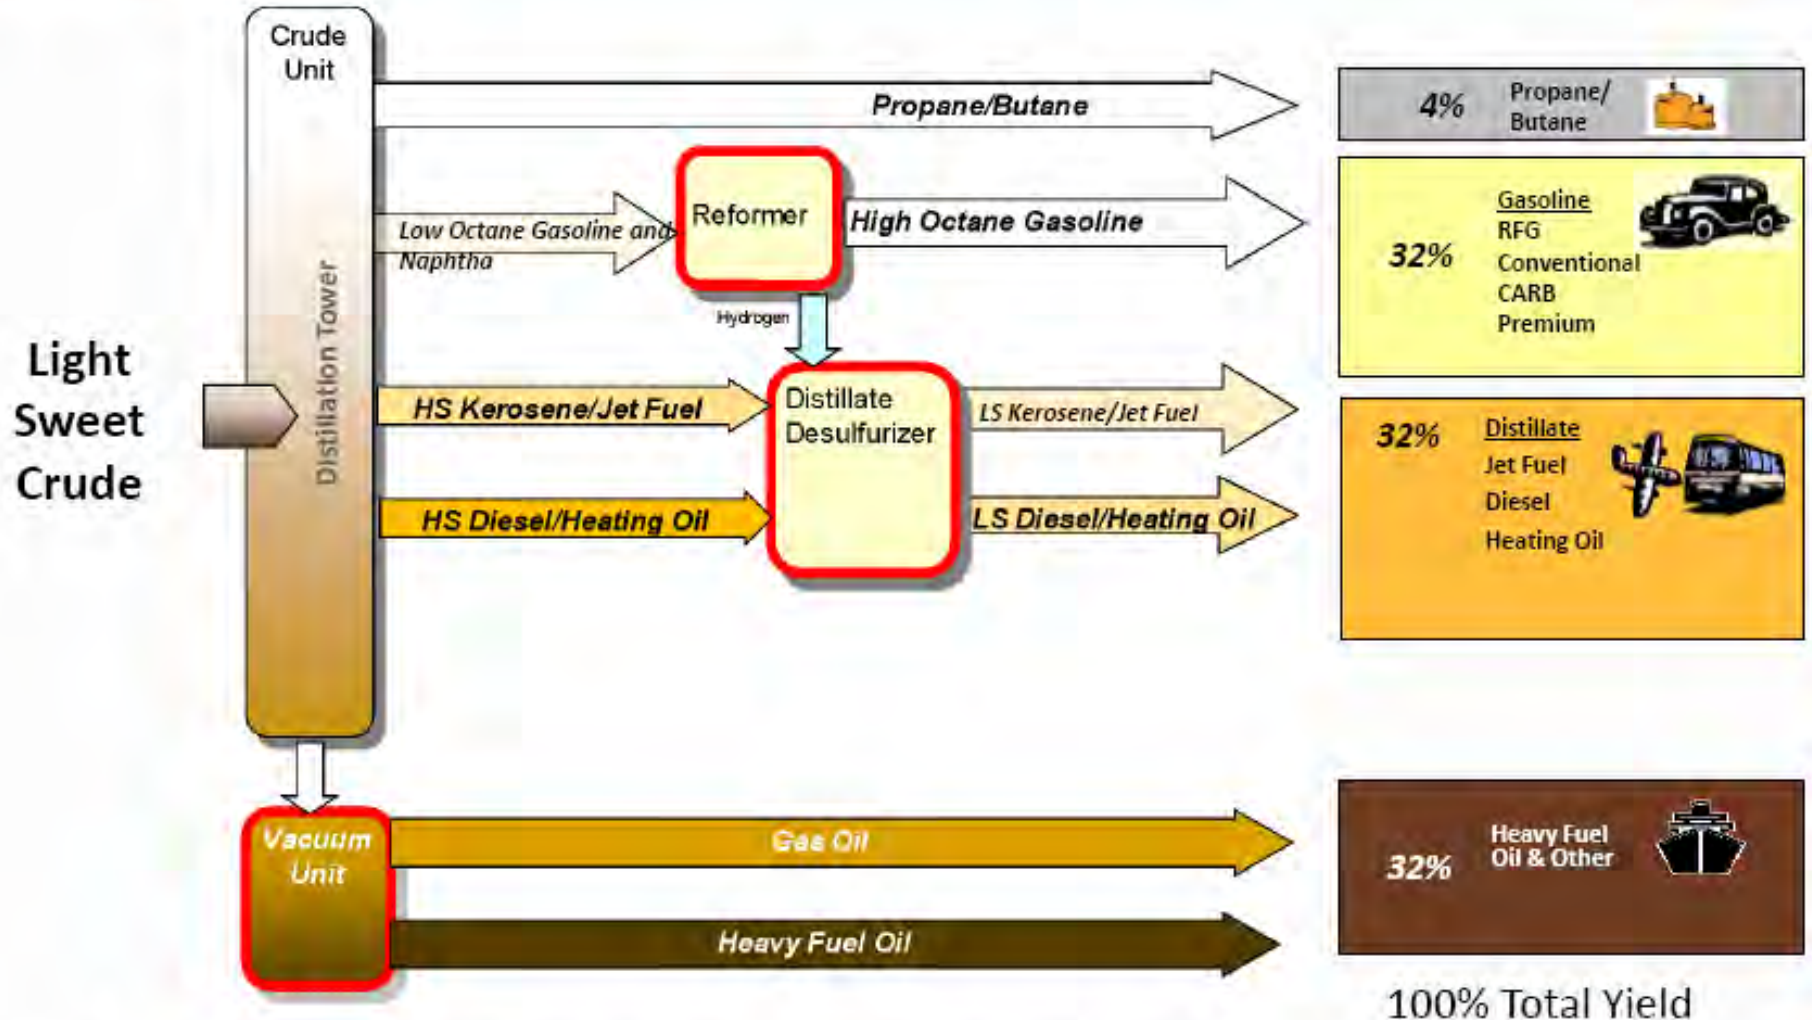


Simple, low upgrading capability refineries run sweet crude

Medium Conversion: Catalytic Cracking

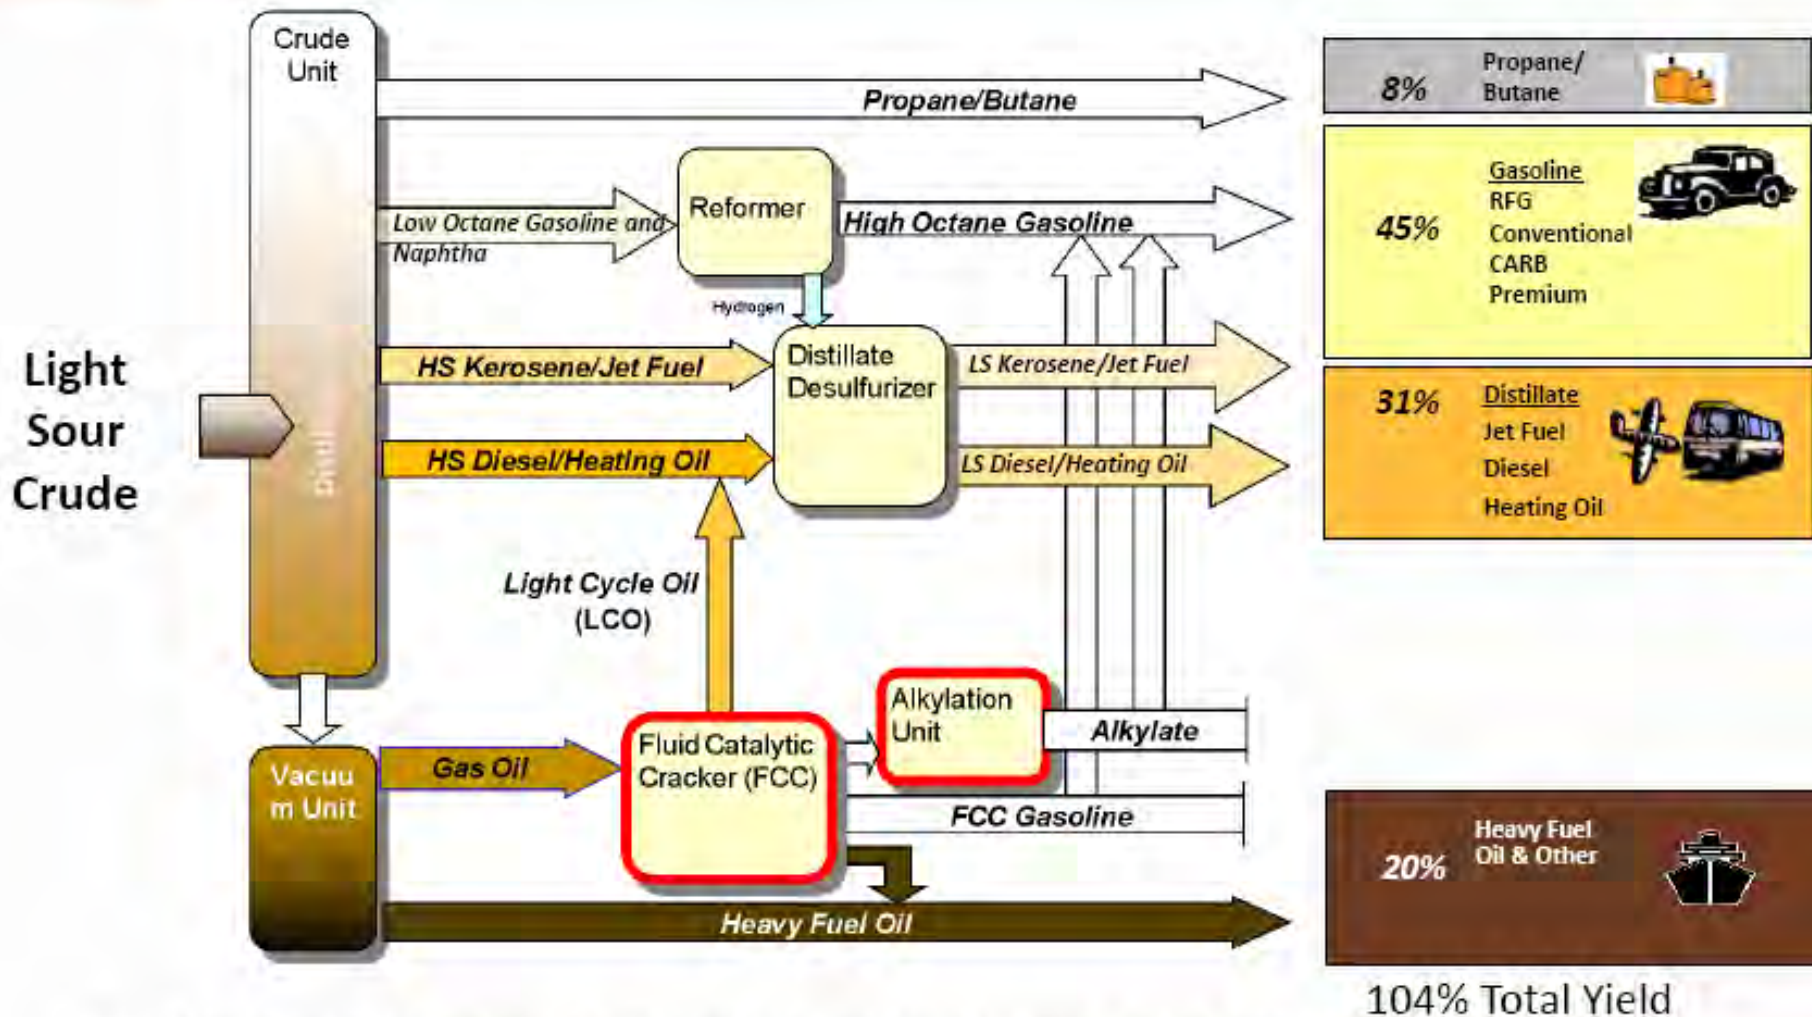

Moderate upgrading capability refineries tend to run more sour crudes while achieving increased higher value product yields and volume gain

High Conversion: Coking/Resid Destruction

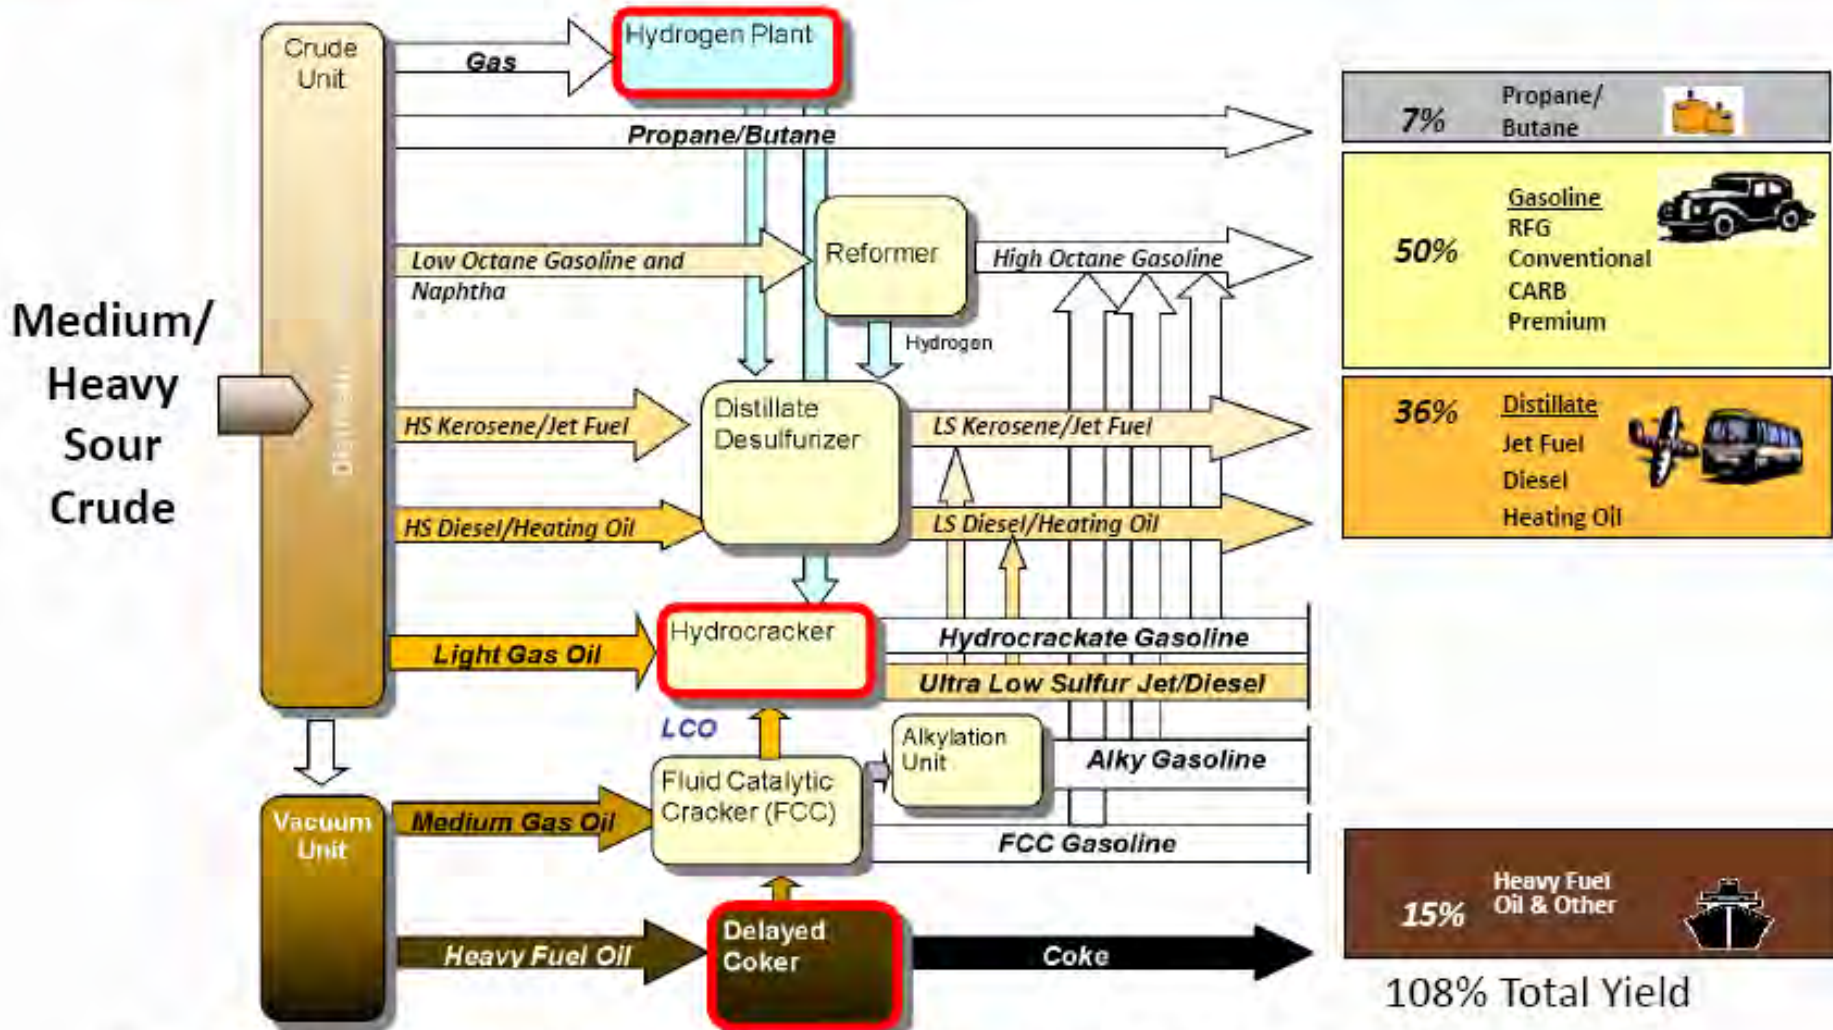

Complex refineries can run heavier and more sour crudes while achieving the highest light product yields and volume gain

Deployment of CCS in Oil Refining Sector...




- ***Oil Refinery has high level of process integration***
- ***Fuel/energy required by the complex refinery is met by using the used of by-product gases or low quality liquid fuel, and balanced by using natural gas or other external fuel.***
- ***No oil refineries are alike...***
 - Very site specific conditions
- ***Benchmarking is necessary...***

Difference between Simple vs Complex Refineries


(Refinery with 150K bbl/d Capacity)



Hydroskimming refinery, 0.6 Mt/a CO₂

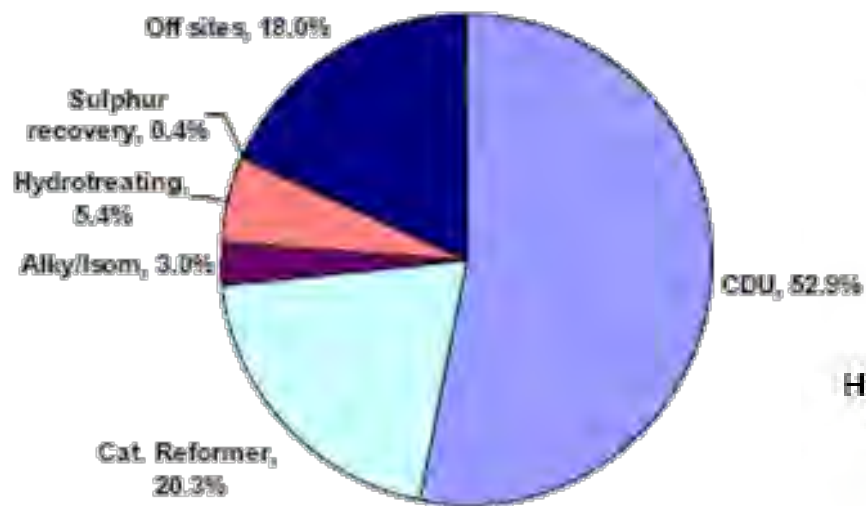

Conversion refinery, 1.4 Mt/a CO₂

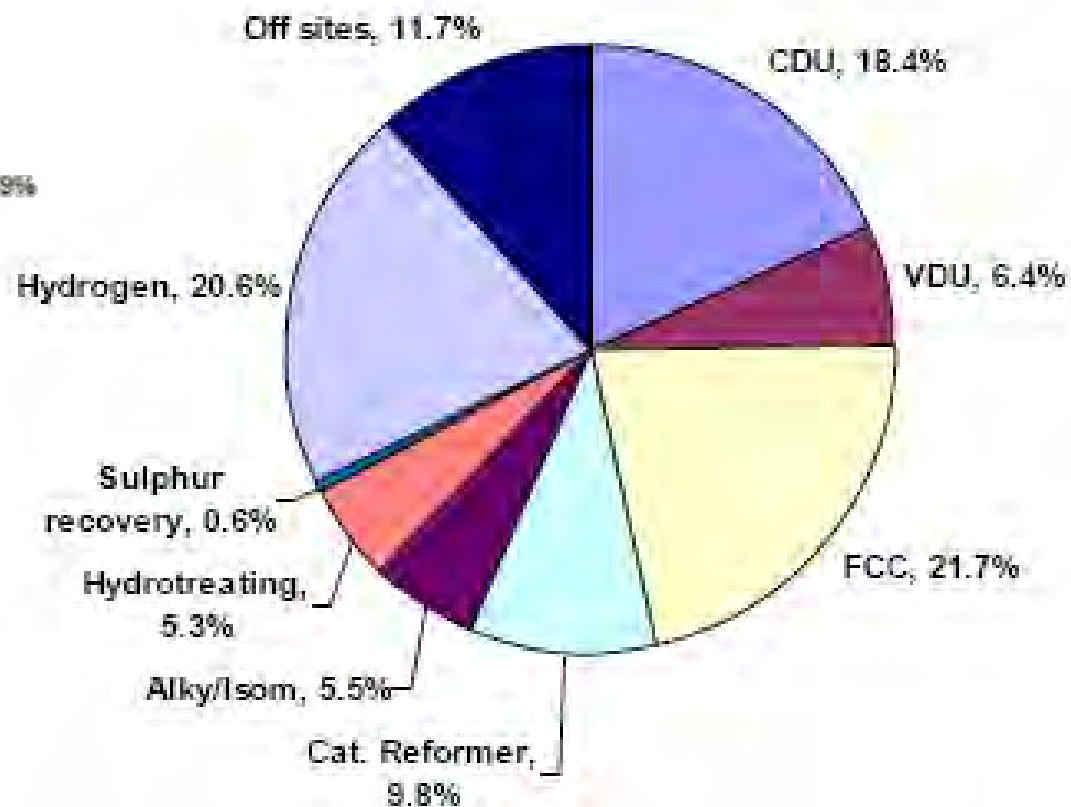


Data from CONCAWE 2011

An Example of CO₂ Emissions Profile of a Complex Oil Refinery



(Shell Pernis Refinery ~400K bbl/d – data from van Straelan, 2010)

Emissions comes from different stacks and have varying CO₂ concentration

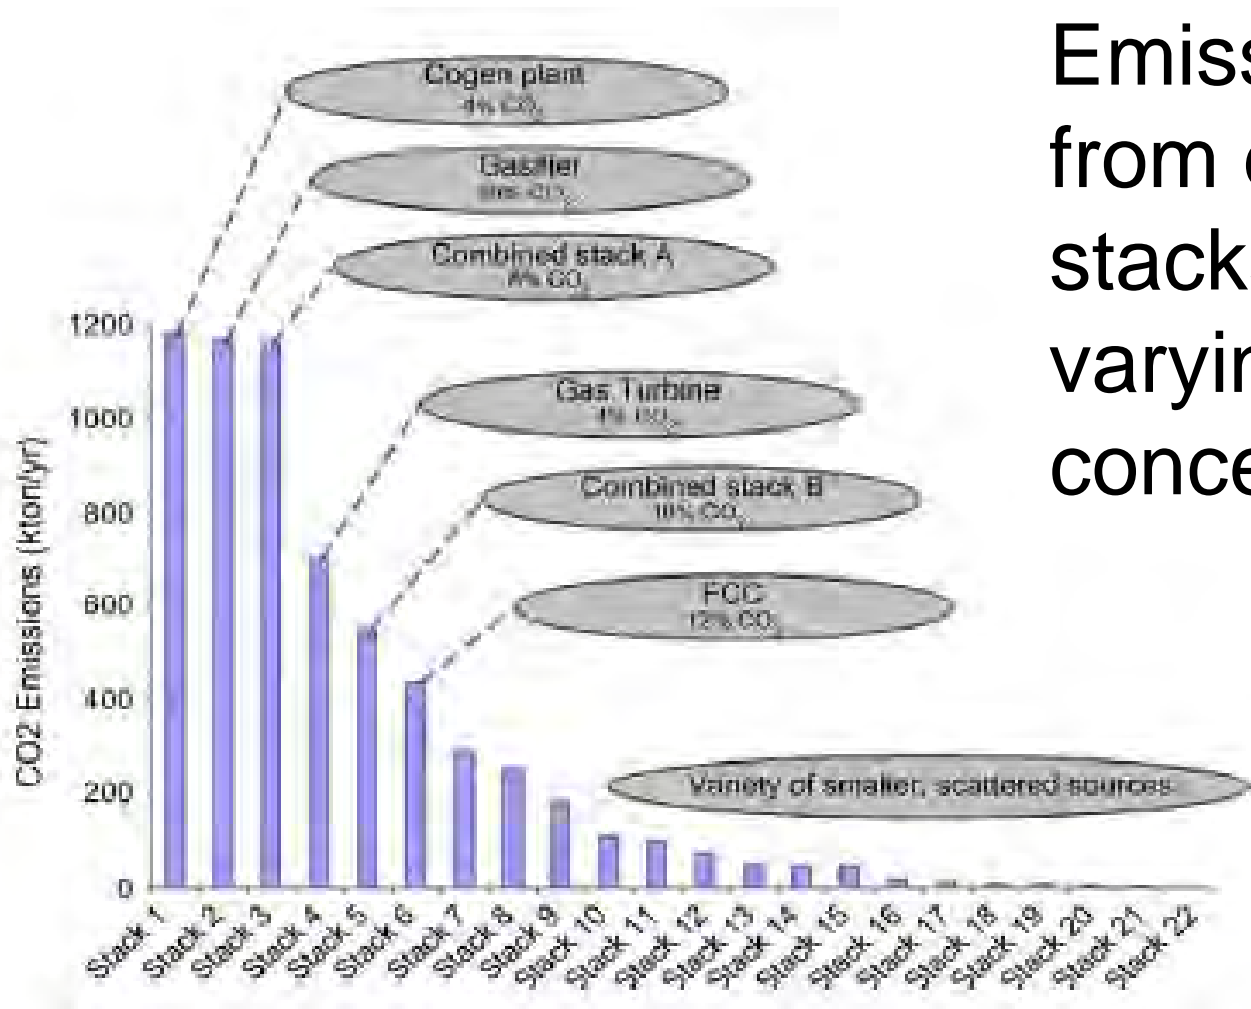


Challenges to Oil Refinery to Reduce CO₂ Emissions (1)



- ***CO₂ emissions varies from site to site.***
 - Comes from different stacks
 - Depends on process complexity
- ***Regulations based only on site's direct CO₂ emission tends to discriminate complex refineries.***
 - Low CO₂ Emissions from simple refinery are not necessarily “good” and high CO₂ Emissions are not always “bad”.
 - They are simply performing different jobs
 - Differences in emissions are due to complexity, not to CO₂ efficiency

Complex Refineries is Required to Meet Demand of the Products

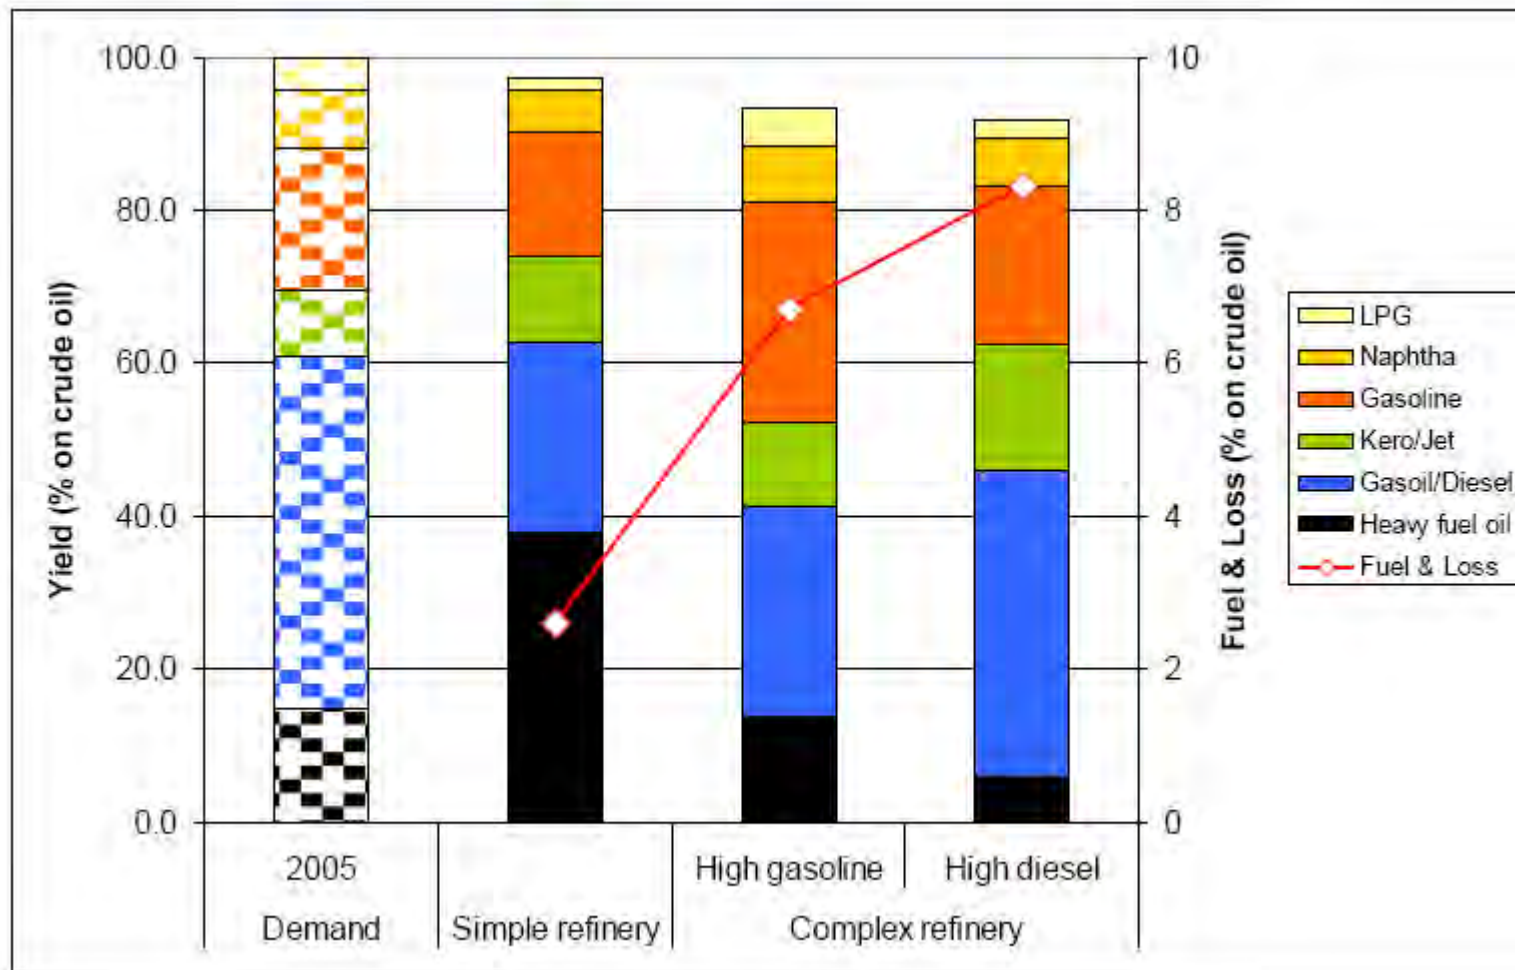


Data from CONCAWE 2011

Demand of Products lead to Evolution of Refineries' Landscape



Original Refinery

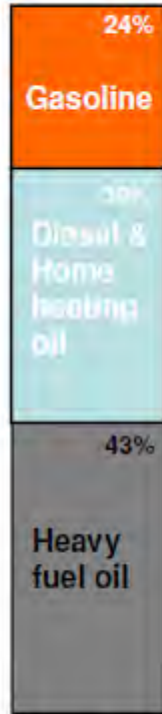


1975



1982-1988
New Units



1990-1994
New Units

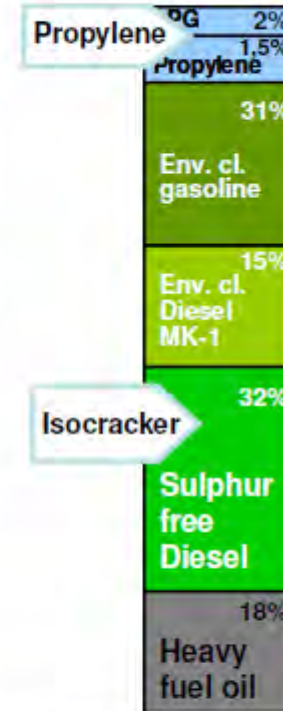


2002-2006
New Units



Simple and Complex Refineries are complementary to each other




Hydroskimming/Topping Refinery

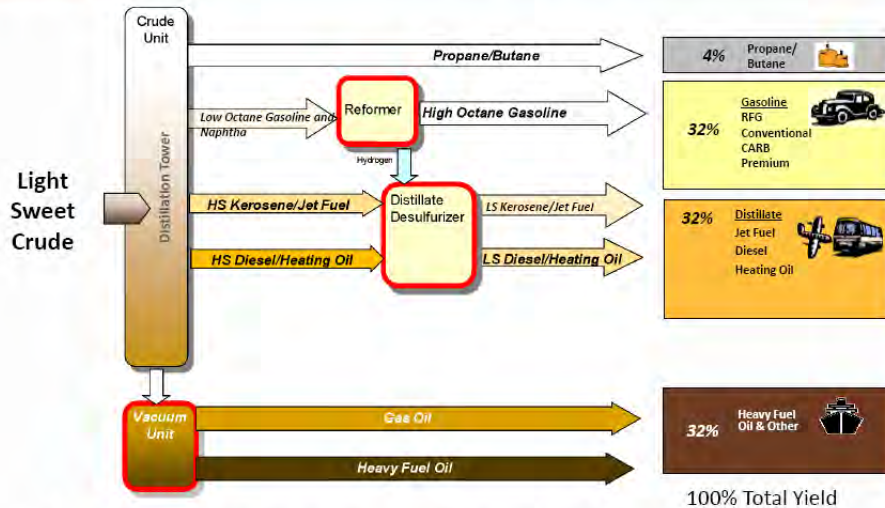

Simple, low upgrading capability refineries run sweet crude

8

High Conversion: Coking/Resid Destruction

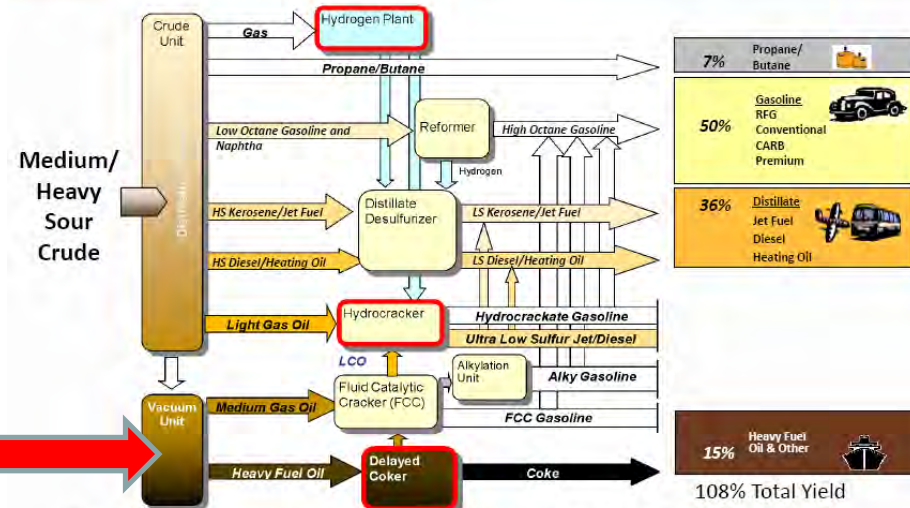

Complex refineries can run heavier and more sour crudes while achieving the highest light product yields and volume gain

11


This illustrates that simple refinery could sell bottom products (HFO) to other complex refineries to further processing to lighter products.

CO₂ Emissions accounting is important.



- *CO₂ emitted per tonne of crude or refined product is an indicator of “what refinery does” rather than “how efficiently it is done”.*
- *Need to evaluate cost of CO₂ capture deployment for oil refineries on a comparable basis.*
- *The use of newly established “CWT” method based a common refinery activity parameter could allow comparable techno-economic analysis for CO₂ capture deployment in an integrated oil refinery.*


Reasons for Refinery Hydrogen Intensification

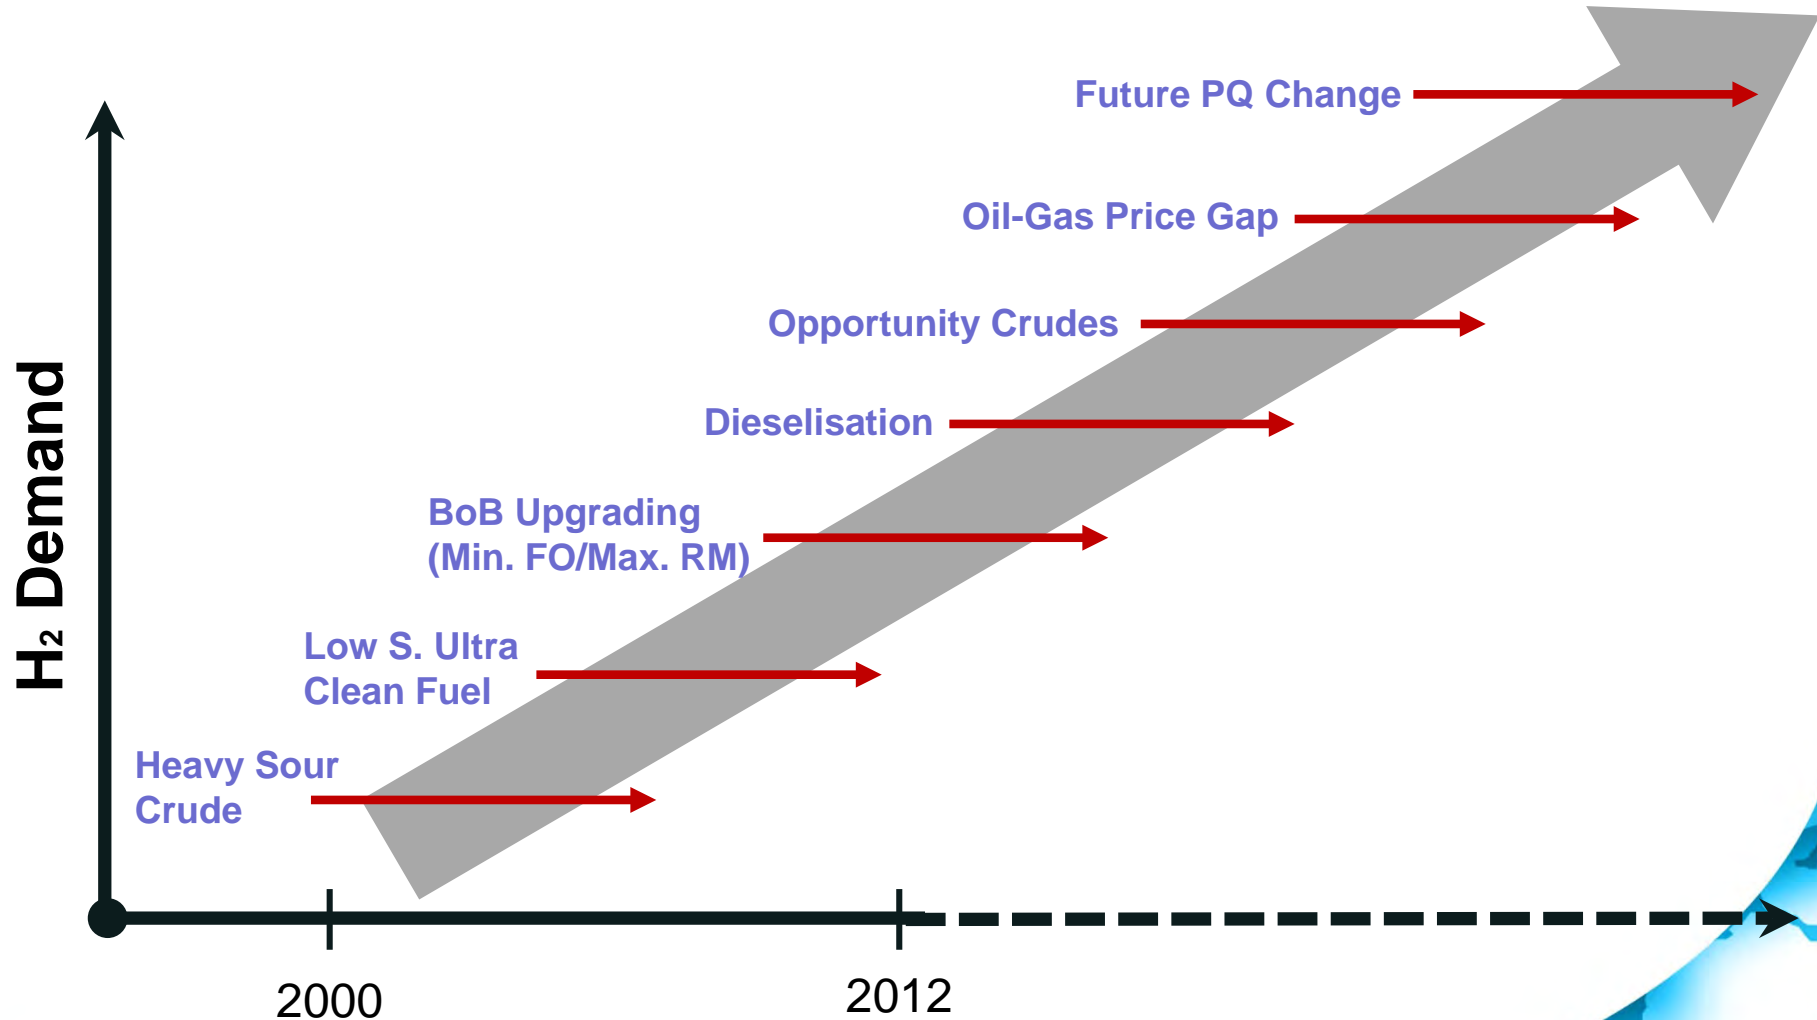

Identifying the Future Growth of CO₂ Emissions of the Oil Refineries



“Chemical” CO₂ emissions from hydrogen production in EU refineries

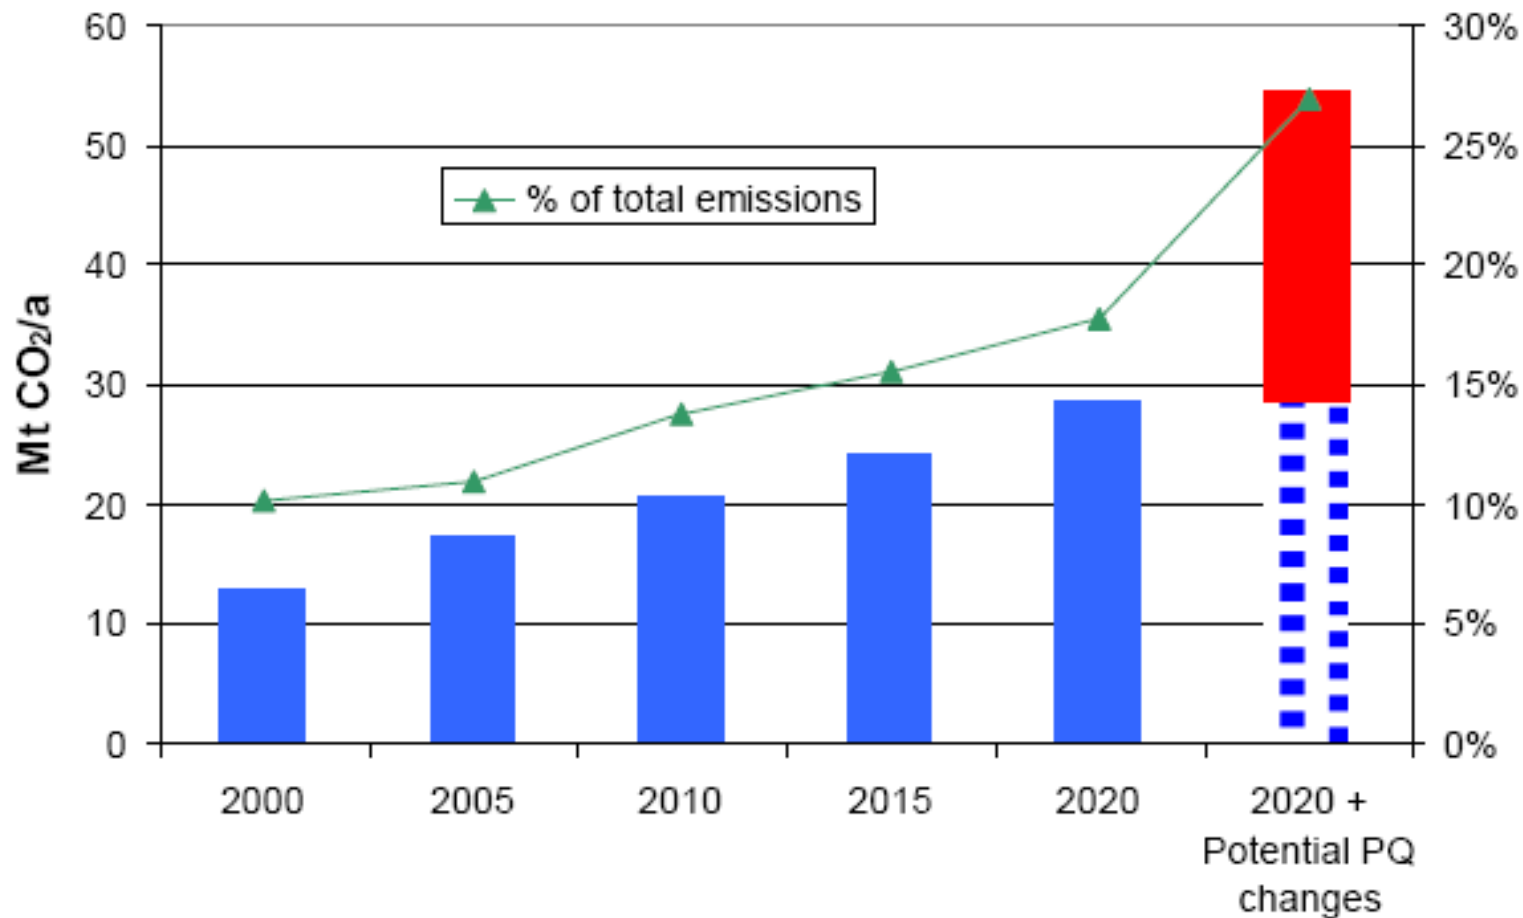

Data from CONCAWE 2011

Scope of the Study



- ***Work will include the following:***
 - To establish the boundary of the battery limit and the techno-economic information of the reference Oil Refinery (both Simple and Complex Refinery Configuration).
 - This cover 3 different capacities (100K, 250K and 500K bbl/d)
 - To look onto options for Retrofitting CO₂ Capture in an integrated refinery (both Simple and Complex Refinery Configuration)
 - Post-Combustion CO₂ Capture Option (Capture Rate between 30 to 70%)
 - Pre-Combustion CO₂ Capture Option based on Hydrogen Enriched Fueled Refinery (Allow centralised CO₂ capture)
 - Oxy-Fired FCC Technology (Capture Rate below 30%)
 - Should cover between 20-22 Cases (Much more complex than the Integrated Steel Study)

CO2 Capture Technologies Options to be considered



- ***Pre-, Post- & Oxyfuel Combustion Options for Fired Heaters and Boilers***
 - Considerations for natural draft stack
 - Considerations for multi-stack and common stack configurations
 - And many others...
- ***Oxygen Blown FCC Regenerator***
- ***Use of H2 enriched refinery fuel***

Cost of CO₂ Capture

(Data from various literature)



Reference	Estimation year	Process Unit/Technology	Cost (€/t CO ₂ avoided)	Cost (\$/t CO ₂ avoided)
RCI [26]	2009	Post-Combustion (Heaters)/Amines	110-130	
CCP2 [14]	Mid2008	Post-Combustion (Boiler)/Amines	96	
ERM [27]	2009	Post-Combustion (Heater, Boiler)/Amines		114-192
CCP2 [14]	Mid2008	Post-Combustion (FCC)/Amines	85-112	
Shell [19]	2007	Post-Combustion/Amines	90-120	

Data Compiled from CONCAWE 2011


Cost of CO₂ Capture (Data from Mello et. al. 2009)



Table 3: Comparative CO₂ avoidance cost for Post- and Oxyfuel combustion CO₂ capture reported by CCP Project (Mello et. al., 2009)

Process Unit	Technology	Cost (\$/t CO ₂ avoided)
Refinery Boiler (Retrofit)	MEA	77
	Oxyfuel	44
Refinery Boiler (New Build – Single Unit)	MEA	96
	Oxyfuel	50
FCC	MEA	85-112
	Oxyfuel	52-55

Cost of CO₂ Capture (Data from van Straelen, 2010)

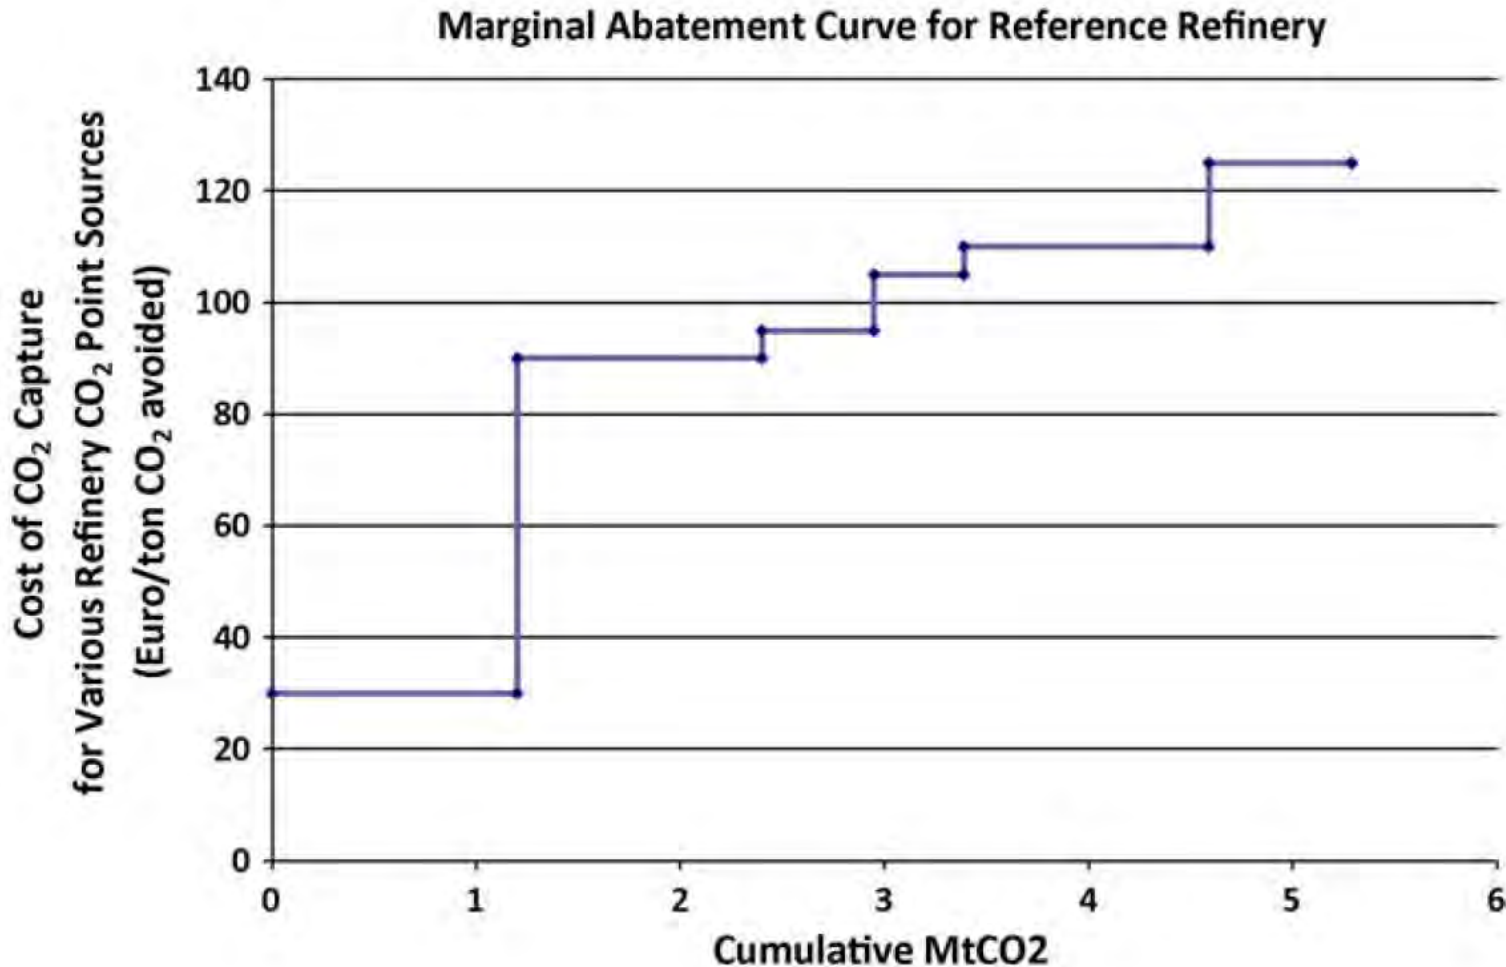

Concluding Remarks



- ***Reported cost (i.e. CO₂ avoidance cost for oil refineries) in various literature are not comparable. It is likely comparing an apple and orange. This is due site to site variation of process complexity and capacity.***
- ***No literature is available that analyses the CO₂ avoidance cost to the Refinery Margin (an important index to viability of refineries)***
- ***There are significant uncertainties with CCS cost estimates, since the technology has not been built to similar scale previously.***
- ***For refiners deep CO₂ reduction (greater than 90%) may be physically impossible or impractical due to multiple source types and capture efficiency limits***
- ***Piggybacking on a larger CO₂ transport network will be crucial***

Progress - Current Status of this Work



- **Proposal submitted to CLIMIT / GASSNOVA for co-funding application - *This has been approved.***
- **Agreement with SINTEF to provide project management and interface to CLIMIT application.**
 - Subcontractor chosen for the project – **Contract Negotiation in-Progress**
- **Agreement with CONCAWE – *Agreed in principle***
 - Provide technical expertise
 - Provide small cash contribution to this study
- **Invite other potential partners for co-funding.**
 - Shell has agreed to provide both cash and in-kind contribution.
 - Discussion on-going with other stakeholders
- **Development and discussion of Scope – to be finalised potential partners**



Thank You

Stanley Santos


IEA Greenhouse Gas R&D Programme

stanley.santos@ieaghg.org



BACK UP SLIDES – CWT METHODOLOGY


- ▶ Refining qualifies as an “exposed” energy-intensive sector
- ▶ Total CO₂ emissions from EU refining are approx **140 Mt/a**
 - = about 8% of total CO₂ emissions from all EU ETS sectors
 - = about 3% of EU total CO₂ emissions

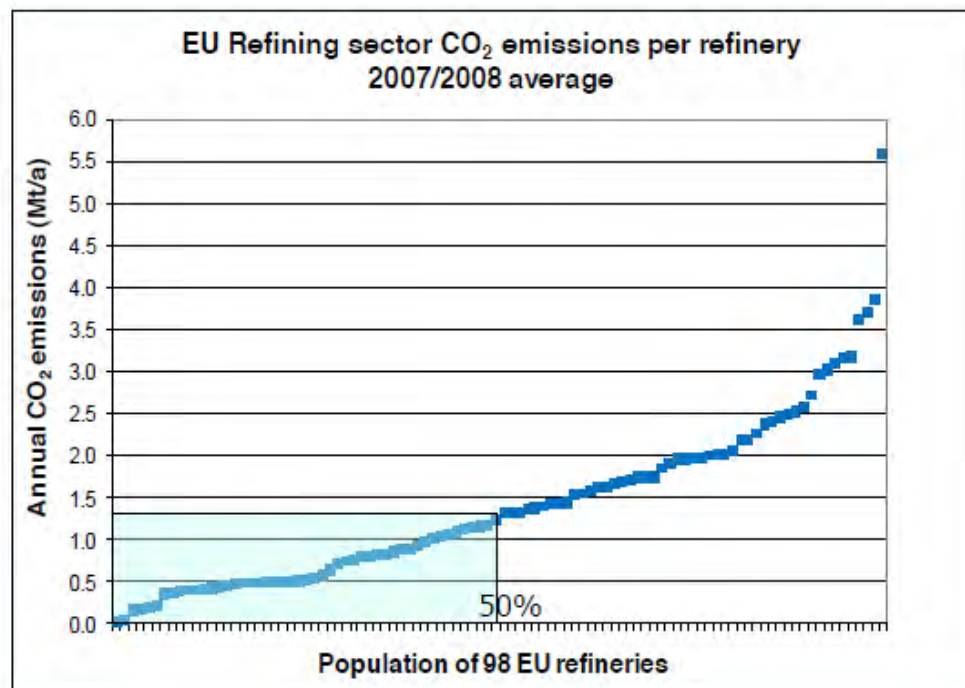


Reproduction permitted
with due acknowledgement



- ▶ A list of generic process units is defined, applicable to all refineries
- ▶ Each process unit is allocated a CWT factor indicating its propensity to emit CO₂ **at standard conditions of energy efficiency and fuel emission factor**
 - ▶ E.g. Crude Distillation Unit = 1, Naphtha Reformer = 4.95,
 - ▶ Each factor accounts for emissions arising from **net energy needs of each unit**, including direct fuel, steam and electricity
 - ▶ Factors also include standard process emissions where relevant, e.g. Fluidised Catalytic Cracker (FCC), Hydrogen Production unit, Coker, Methanol from Syngas
- ▶ The throughput of each process unit is multiplied by its CWT factor and the results are totalled up
- ▶ An "off-sites" allowance is added for emissions not linked to specific process units e.g. blending, tankage, product despatching
- ▶ The resulting total CWT is the total **activity** or 'product' of the refinery
 - ▶ Common denominator for benchmarking refineries for ETS phase III
- ▶ The CWT methodology is Solomon property
 - ▶ CONCAWE has a license to use and promote it for EU refineries

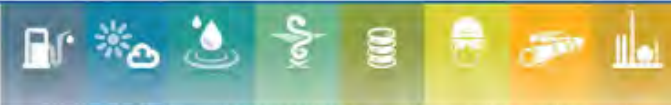

CWT is not a benchmark in itself –
it enables a benchmarking methodology to be developed

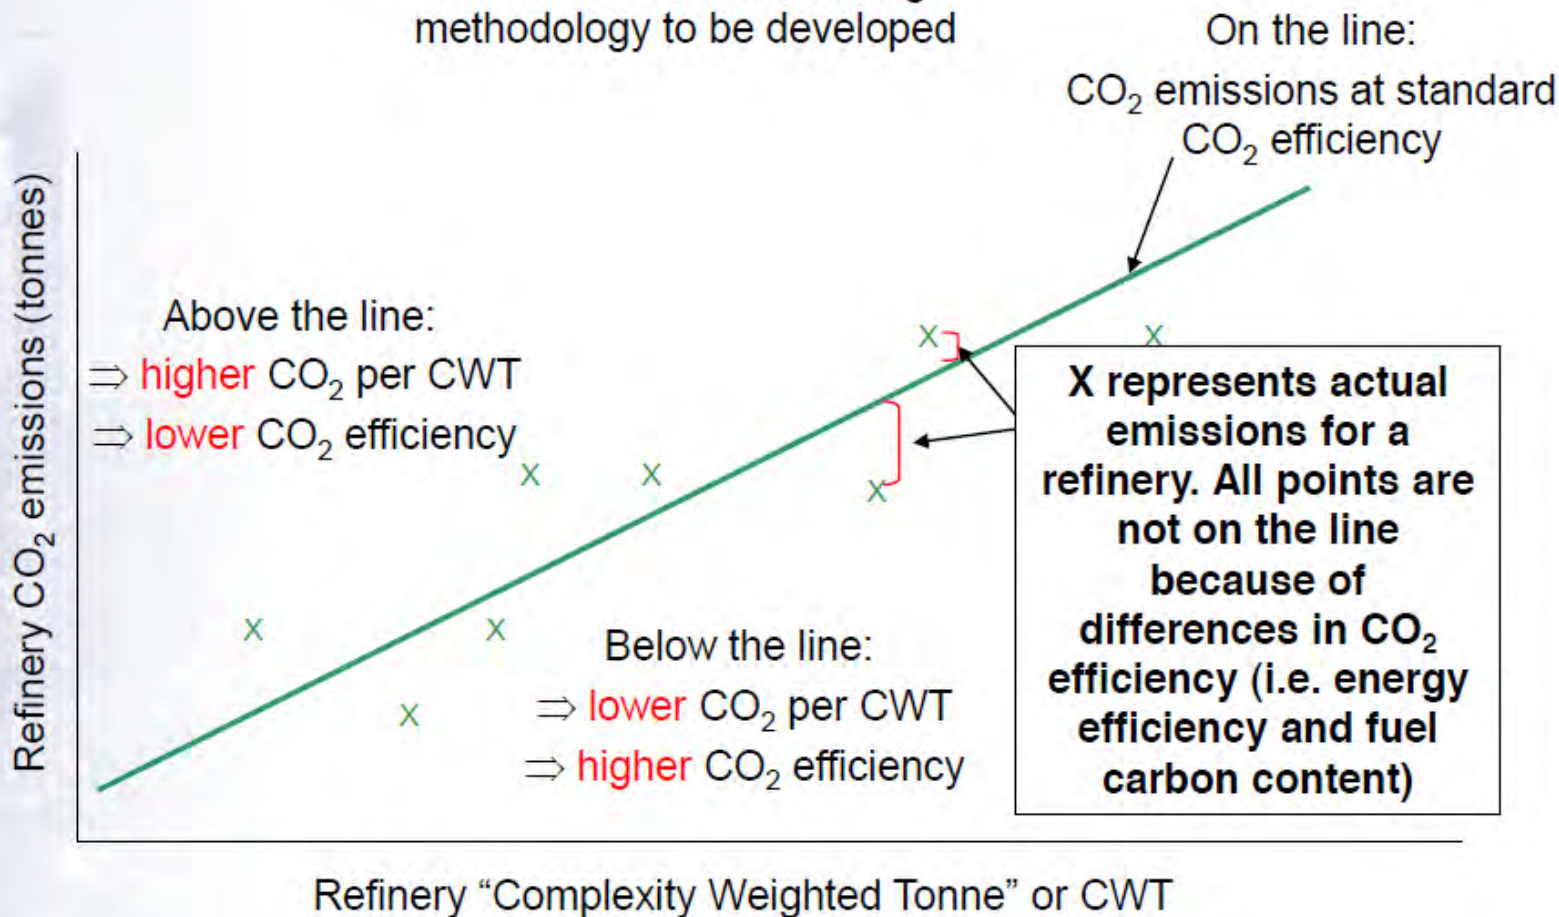


Reproduction permitted with due acknowledgement



- ▶ 98 mainstream refineries were identified for the CWT benchmark
- ▶ Additional 15 "atypical" sites were not included in CWT benchmark
 - ▶ Producers of specialities, not normal range of fuels products
 - ▶ Fallback approaches apply to these sites (fuel and/or heat benchmark)
- ▶ CONCAWE collected data from members for all mainstream refineries
 - ▶ Data is kept strictly confidential
 - ▶ Annual unit throughputs
 - ▶ Verified emissions, fuels and emission factors
 - ▶ Electricity production, imports and exports
 - ▶ Heat imports and exports
- ▶ CO₂ performance indicator (PI) was determined for each refinery, defined as:
PI = [actual CO₂ emissions*] / [CWT] (*) discounting emissions from exports/imports of heat or electricity
- ▶ Benchmarking curve submitted to the EC (after independent verification):
 - ▶ Plot of average PIs over 2007-2008 of all 98 refineries
 - ▶ Refining Products Benchmark is average PI of 10% best refineries
= 0.0295 t CO₂ per CWT
- ▶ Mean EU refining CO₂ performance is **0.037 t CO₂ per CWT**

Reproduction permitted
with due acknowledgement



- ▶ Phase III free allowances are calculated for each refinery as follows:
 - ▶ Determine the refinery's **Baseline CWT**
 - = median of annual total CWT over 2005-2008 or 2009-2010
 - ▶ Determine Electricity Correction Factor (**ECF**) over chosen baseline period
 - = [Direct emissions, excluding electricity & including net heat imports] / [Total emissions]
 - = typically about **0.88** (i.e. 88% of emissions are NOT electricity-related)
 - ▶ Determine refinery's Free Allowances
 - = **0.0295 x [Baseline CWT] x [ECF]**

Example: Refinery Y

Crude throughput = approx 7 Mt/a

Baseline CWT = 33 million

ECF = 0.90

Free ETS allowances

= $0.0295 \times 33 \text{ million} \times 0.9$

= **0.88 million t/a**

Baseline verified emissions

= 1.30 million t/a

Free ETS allowances/baseline emissions

= 67%

Refinery baseline CWT values (median 2005-2008) before adjustments for extensions/closures

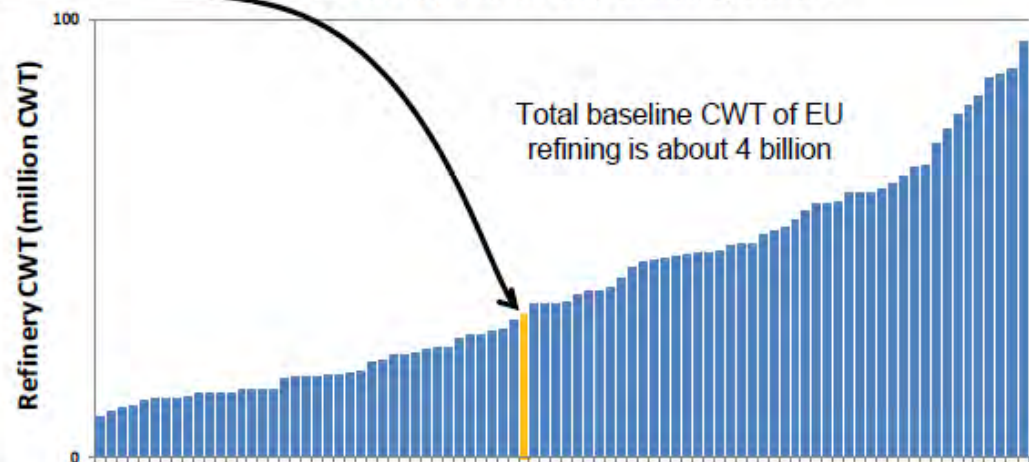


Chart excludes the 5 highest and 5 lowest CWT refineries, for confidentiality reasons

Reproduction permitted with due acknowledgement

