UPPSALA UNIVERSITET

EWRE

Progress of the Heletz pilot injection project

Auli Niemi, Uppsala University, Sweden
Jac Bensabat, EWRE, Israel

Combined Monitoring and Modeling Network Meeting, IEAGHG
Edinburgh 6-8th July, 2016

TRUST CO_2

CO_2QUEST

CO_2

MUSTANG CO_2

Heletz deep CO_2 injection experiment site

Scientifically motivated CO2 injection experiment site of scCO2 injection to a reservoir layer at 1600 m depth, with monitoring and sampling

Heletz

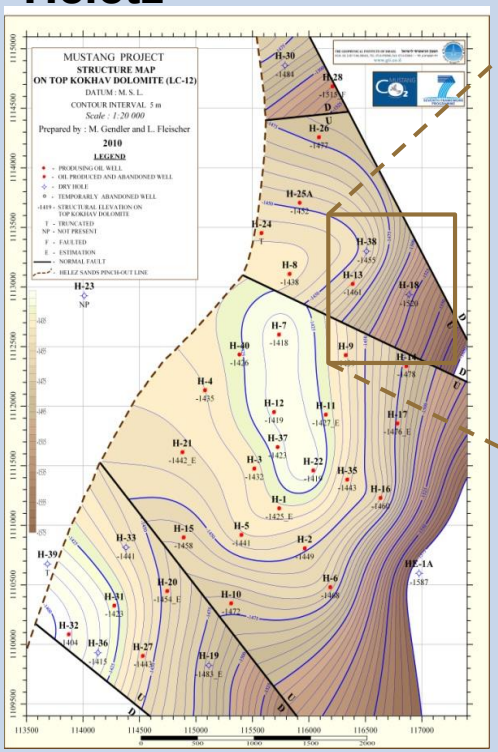

Heletz North

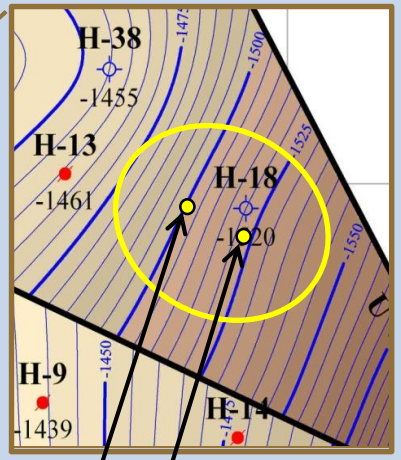

wells for field experiments

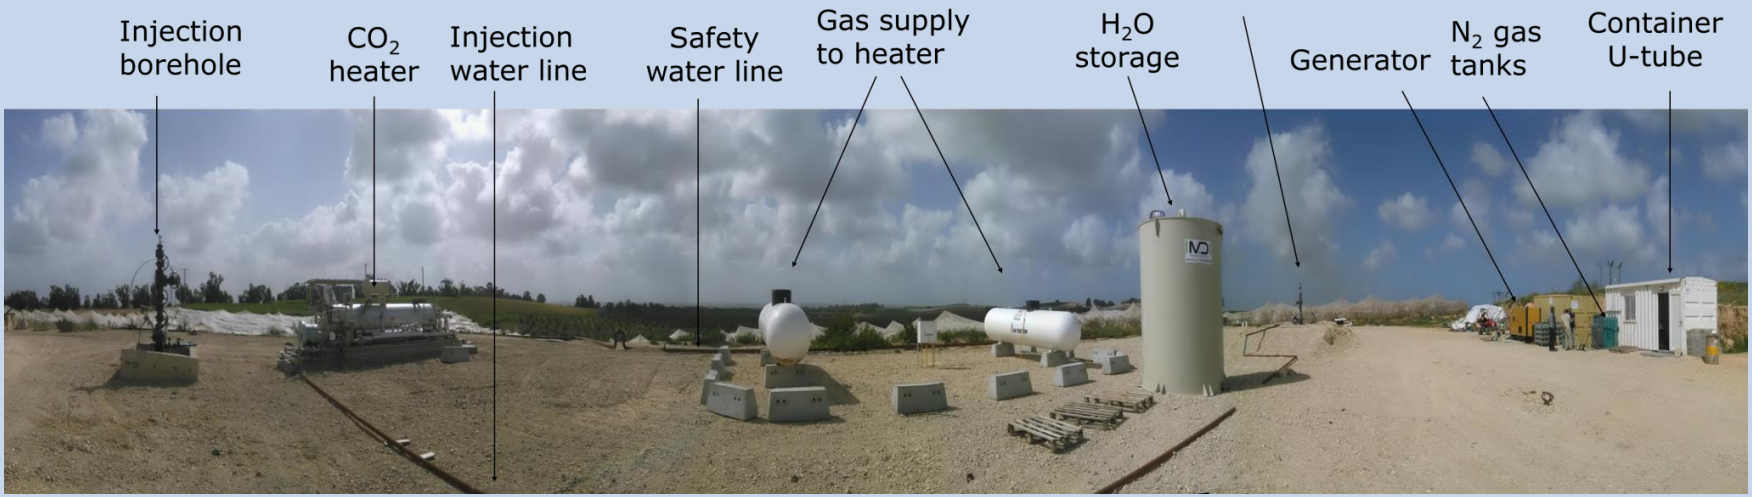

The site has been developed within EU funded R&D projects

MUSTANG – large-scale integrating project for quantifying Saline Aquifers for CO2 Geological Storage (2009-2014)
(led by Uppsala University) http://www.co2mustang.eu

Panacea – project focusing **on long term effects** of CO2 Geological Storage (2012-2014) (led by EWRE, Israel) http://panacea-co2.org/

TRUST – project continuing and **expanding the field experiment** of MUSTANG (Nov. 2012-Nov 2017) (led by EWRE, Israel) http://trust-co2.org/

CO2QUEST – project focusing on **effect of impurities** of CO2 stream (March 2013- Feb 2016) (led by UCL, England) http://www.co2quest.eu/

CO_2QUEST

UPPSALA UNIVERSITET

Objectives of the experimental program

- To gain understanding and develop methods to determine the two key trapping mechanisms of CO2 - **residual trapping and dissolution trapping** - at field scale, evaluate the impact of heterogeneity (MUSTANG)

- Estimate **how to enhance trapping** by different modes of injection (TRUST)

- **Effect of impurity gases** in CO2 stream (CO2QUEST)

MUSTANG CO_2 TRUST CO_2 **CO_2QUEST**

HELETZ SITE - STRUCTURAL MODEL

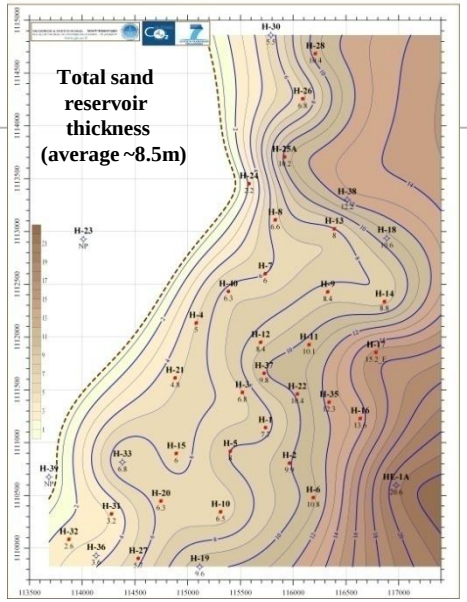

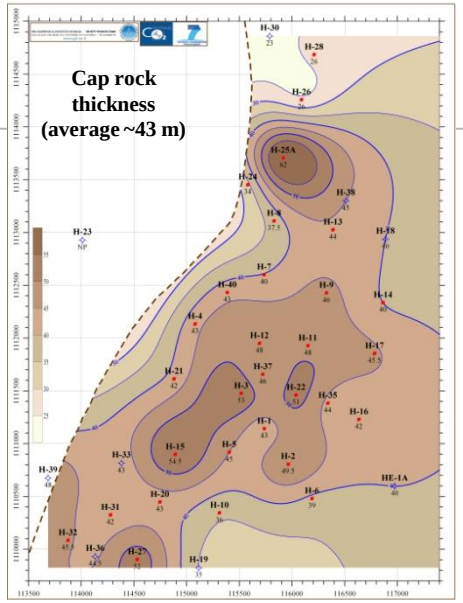

3D structural maps

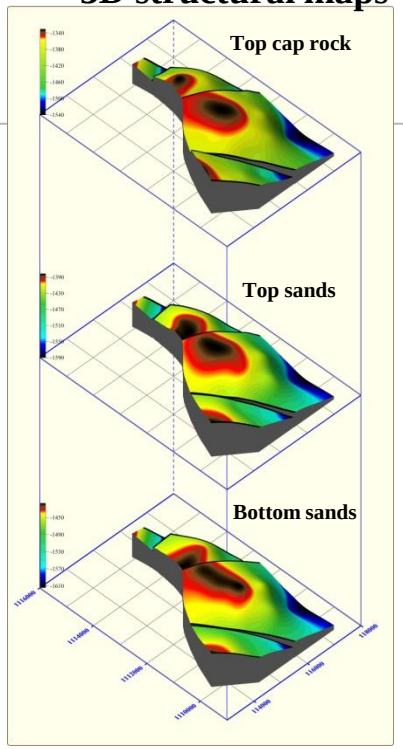

3D isopach maps

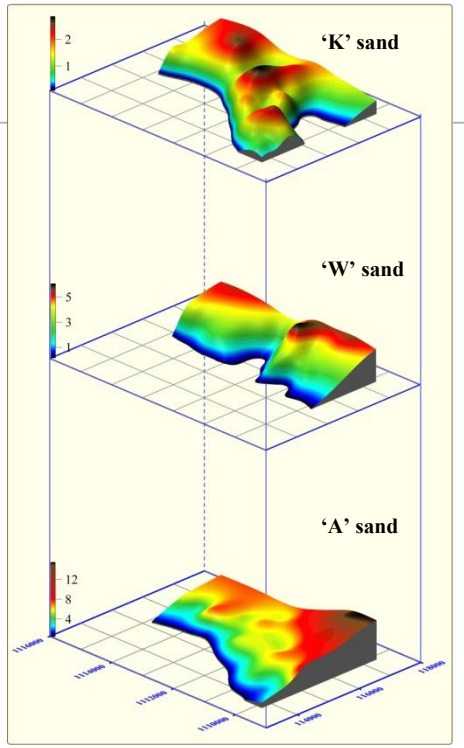

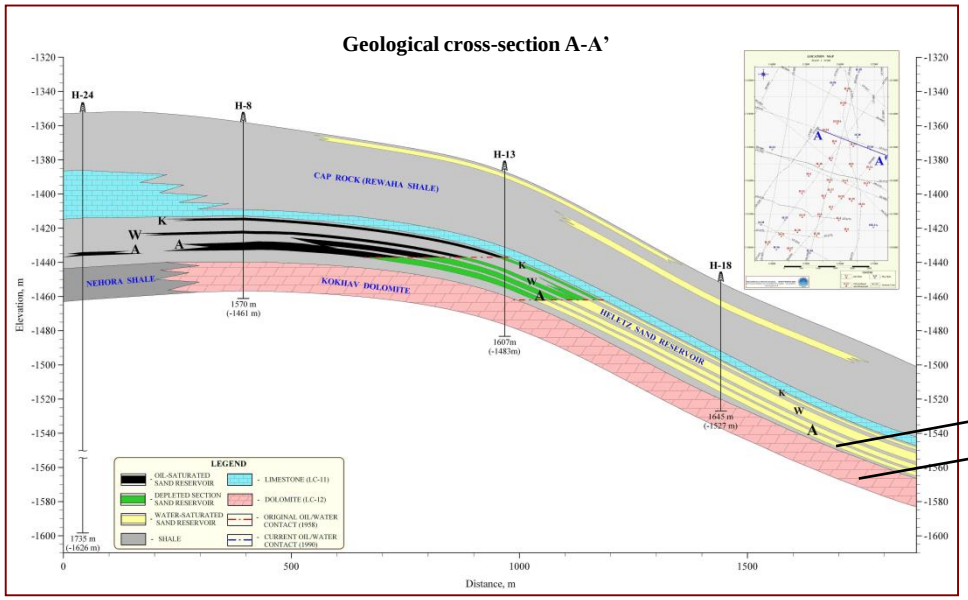

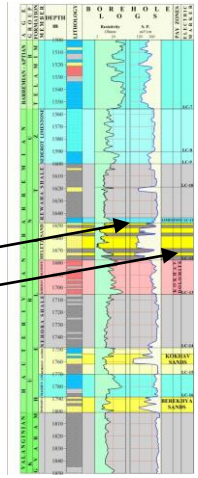

Niemi, A. et al (2016) Heletz experimental site overview, characterization and data analysis for CO2 injection and geological storage Int. J. of Greenhouse Gas Control. Vol 48; Pp: 3-23.

Site setup for the experiments

Location of monitoring well

Injection well

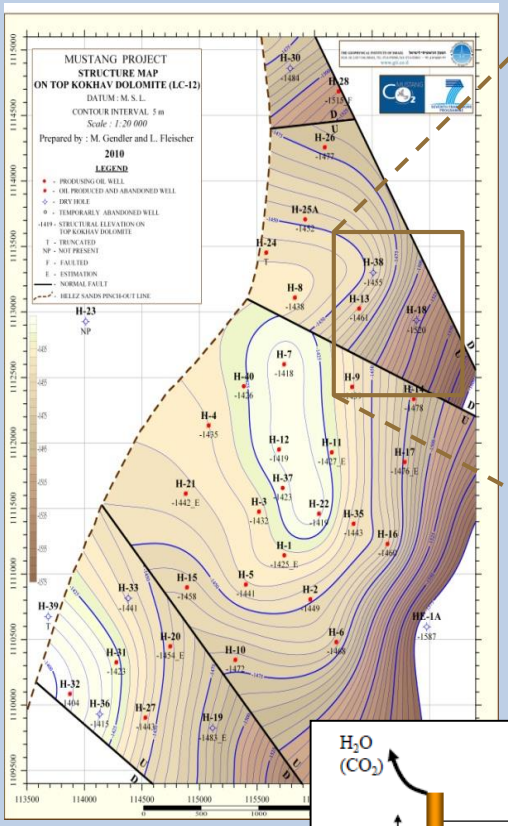

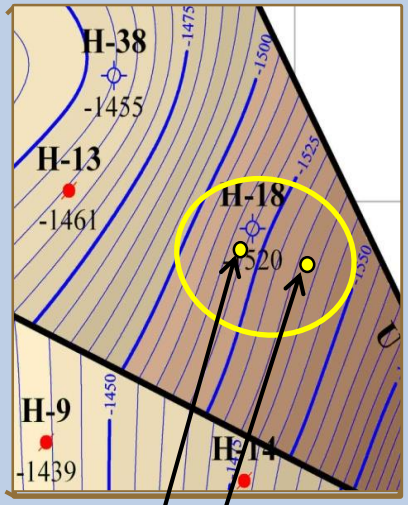

wells for field experiments

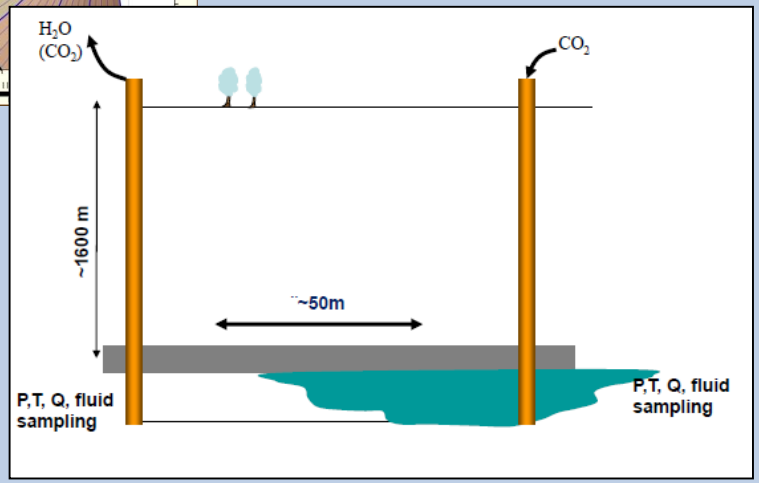

Well instrumentation

fluid injection/withdrawal, P/T sensors,

U-tube fluid sampling, optical fibre

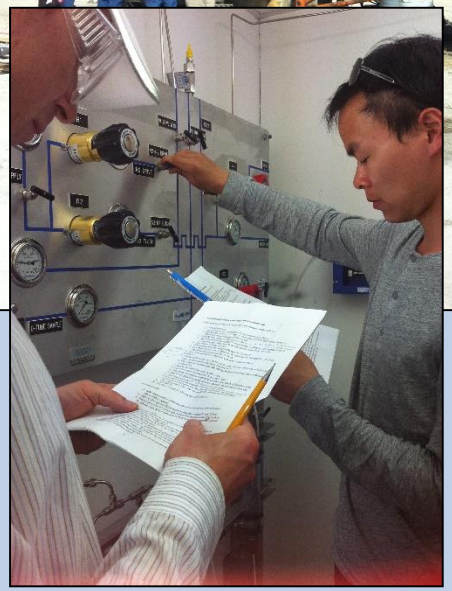

Injection system

Site Characterization- structural model

UPPSALA UNIVERSITET

Data from old oil wells for the entire region gave a good basis, locally refined based on data from the new wells

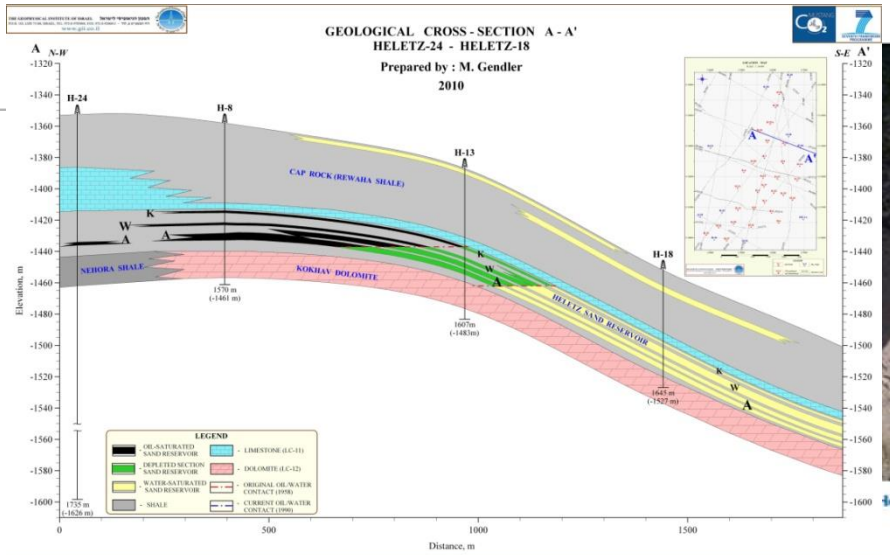

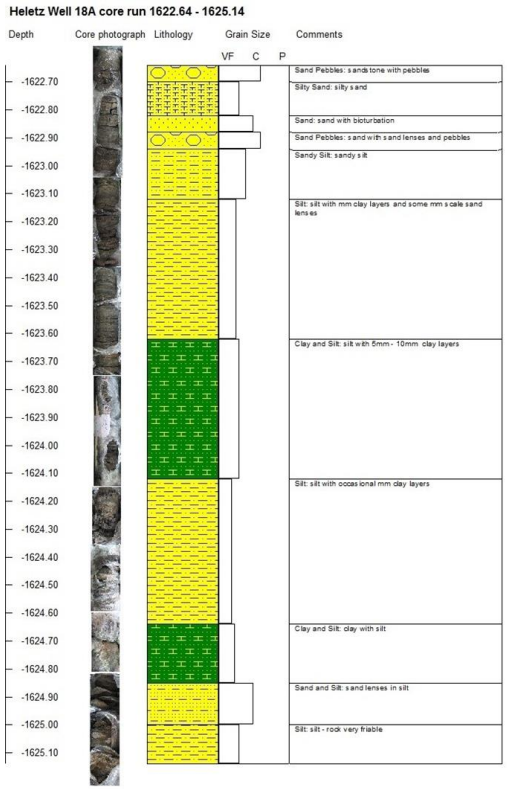

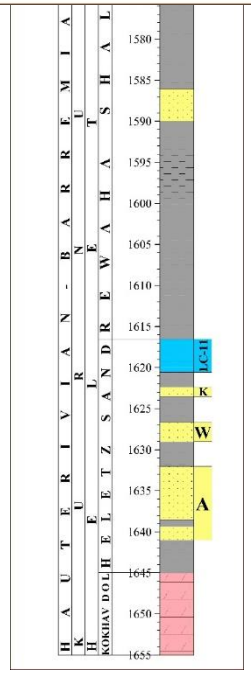

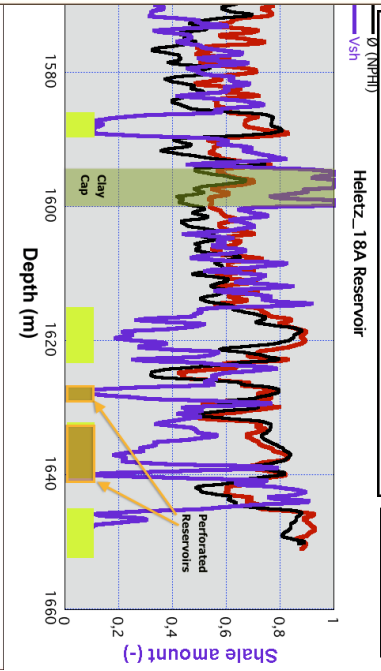

Niemi, A. et al (2016) Heletz experimental site overview, characterization and data analysis FOr CO2 injection and geological storage. int. J. of Greenhouse Gas Control. Vol 48; Pp: 3-23.

Site Characterization- conductivity and porosity

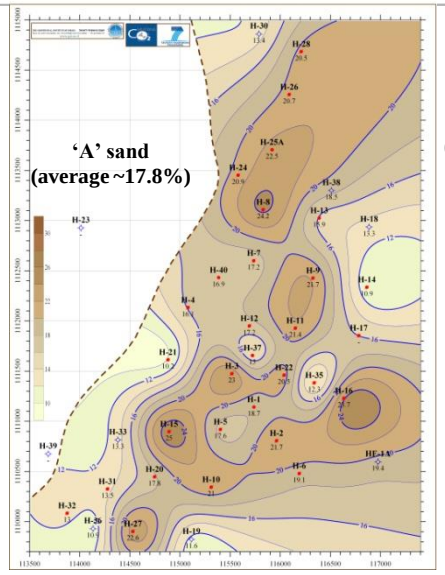

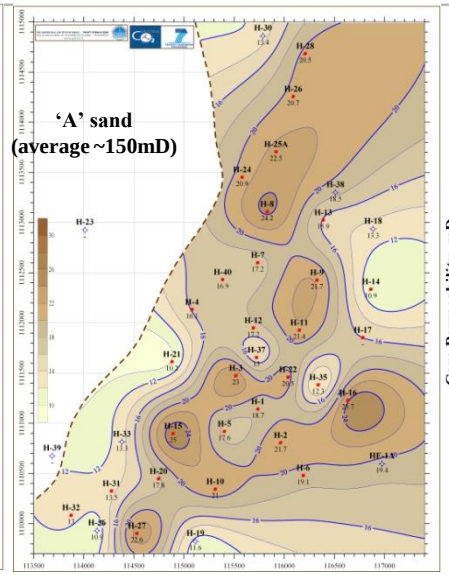

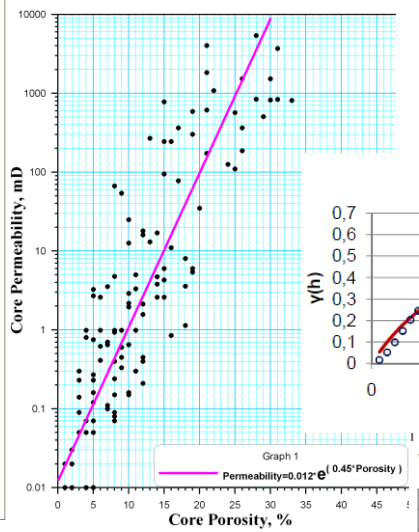

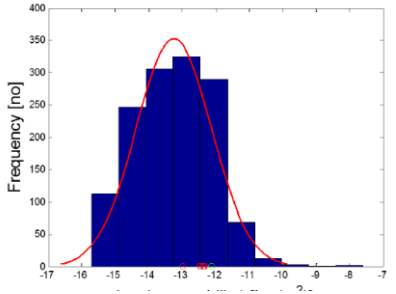

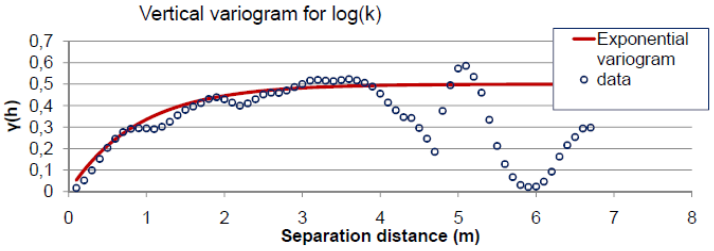

Table 10: Statistical data for Heletz sand layer permeabilities

Data from entire Heletz formation			
Parameter	*Values*	*Layer*	*Data base*
μ, σ (m^2 and mD) [1] of model to log-converted data [2]	-13.25, 1.1 (log m^2) 2.1, 1.1 (log mD)	A	borehole porosity logs
-''-	-12.9, 1.1 (log(m^2): 1.7, 1.1 (log mD)	W	-''-
Data from old wells in the vicinity of experimental area			
m, s (mD) from log-converted data [3]	1.43, 0.725	Layers A,W, K	Borehole porosity logs, wells H-13, H-18 and H-38 only
Parameters for exponential model fitted to variogram data [4] a, nugget (C_0), sill (ω)	All layers 0.9,0, 0.526	-''-	-''-
Data from the new drilled wells			
Range of values (mD) [5] Range of values (log transformed, m^2)	100-410 ~-13-12.4	Layer A	Core samples, only tests with in-situ P/T conditions included
Horizontal/ Vertical permeability (mD)	735/135	Layers A, W	In-situ well test, provides an 'upscaled' value for the entire layer

Niemi, A. et al (2016) Int. J. of Greenhouse Gas Control. Vol 48; May 2016.

Site Characterization- conductivity and porosity

UPPSALA UNIVERSITET

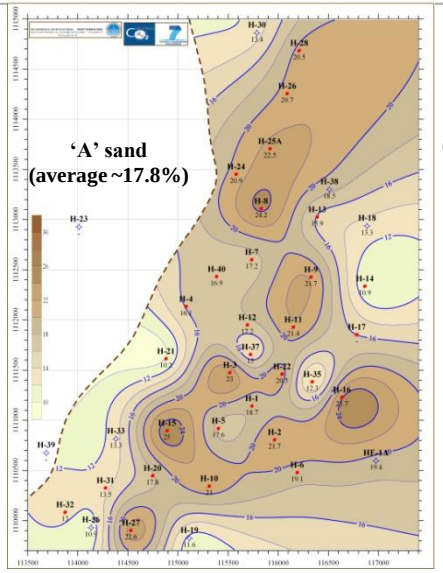

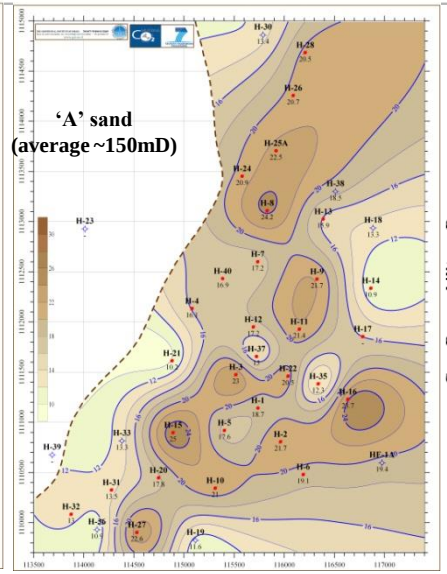

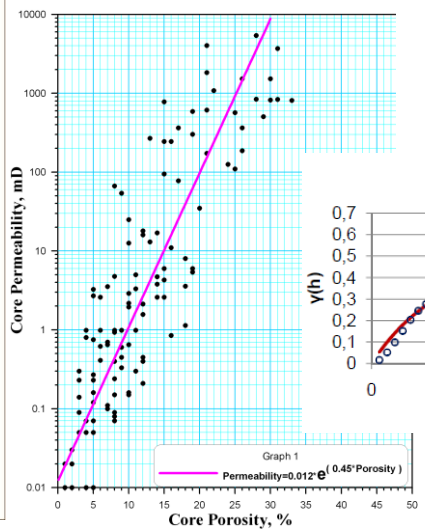

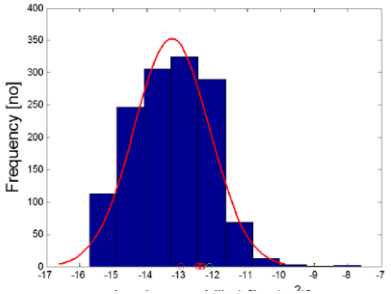

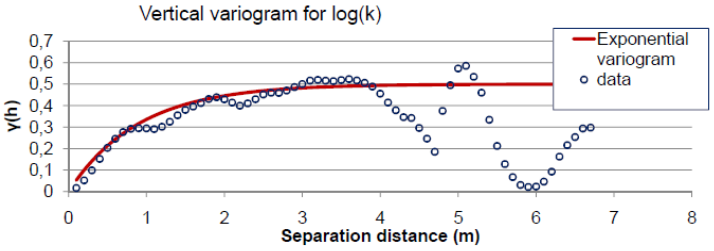

Niemi, A. et al (2016) Int. J. of Greenhouse Gas Control. In press, available online

Table 10: Statistical data for Heletz sand layer permeabilities

Parameter	*Values*	*Layer*	*Data base*
Data from entire Heletz formation			
μ, σ (m^2 and mD) (1 of model to log-converted data (2	-13.25, 1.1 (log m^2) 2.1, 1.1 (log mD)	A	borehole porosity logs
-''-	-12.9, 1.1 (log(m^2): 1.7, 1.1 (log mD)	W	-''-
Data from old wells in the vicinity of experimental area			
m, s (mD) from log-converted data (3	1.43, 0.725	Layers A,W, K	Borehole porosity logs, wells H-13, H-18 and H-38 only
Parameters for exponential model fitted to variogram data (4 a, nugget (C_0), sill (ω)	All layers 0.9,0, 0.526	-''-	-''-
Data from the new drilled wells			
Range of values (mD) (5 Range of values (log transformed m^2)	100-410 ~-13-12.4	Layer	Core samples, only tests with in-situ P/T conditions included
Horizontal/ Vertical permeability (mD)	735/135	Layers A, W	In-situ well test, provides an 'upscaled' value for the entire layer

Site Characterization- selected lab results

UPPSALA UNIVERSITET

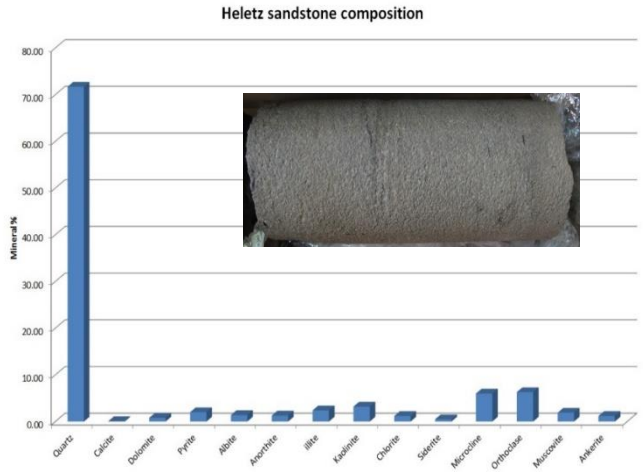

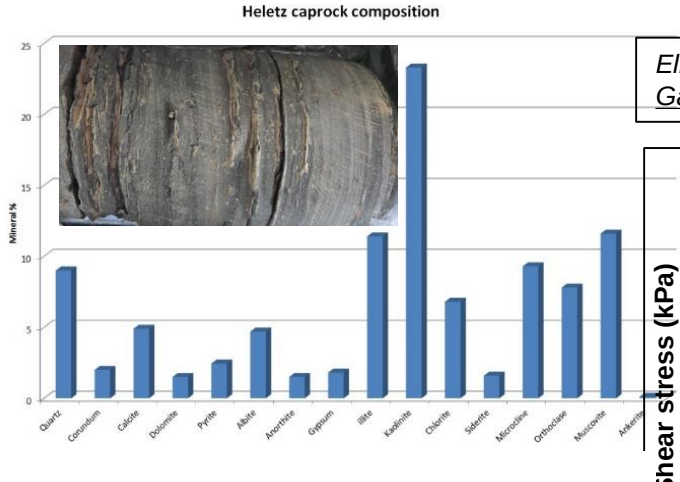

Elhmai et al (2016) Int. J. of Greenhouse Gas Control. Vol 48, Pp. 84-93. May 2016.

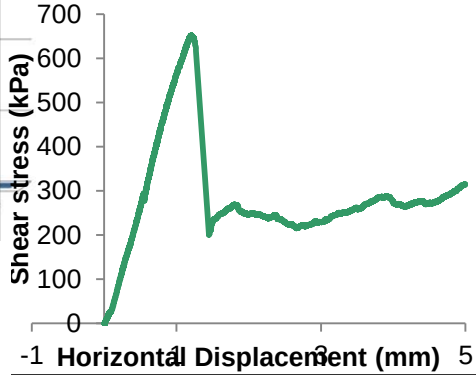

Edlmann. et al (2016) Int. J. of Greenhouse Gas Control. Vol 48, PP. 94-104. May 2016

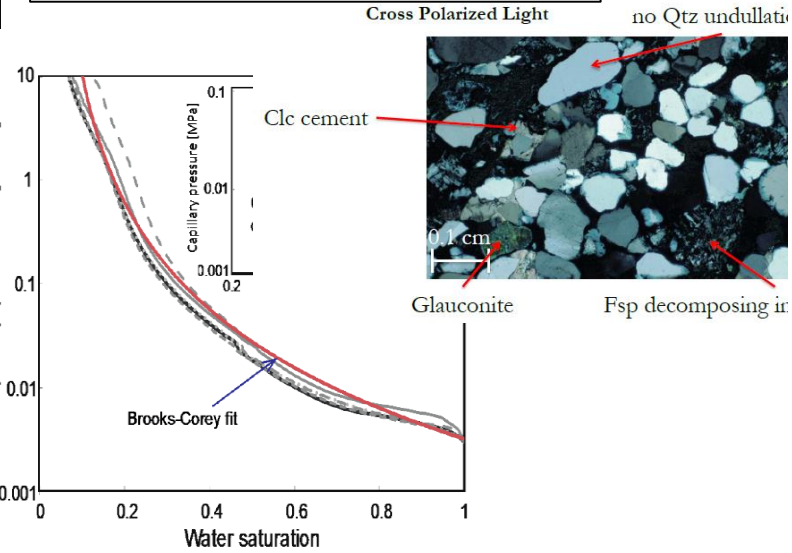

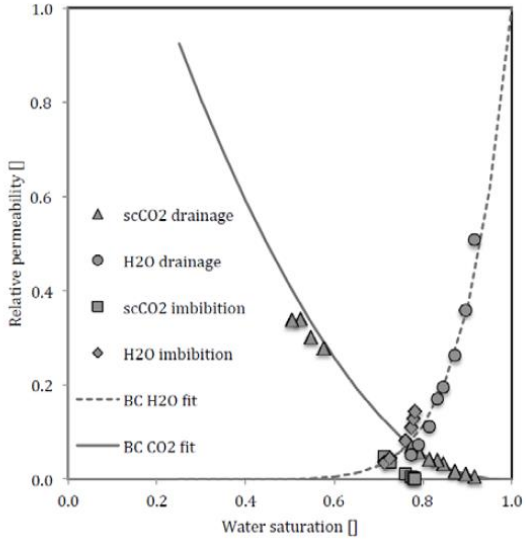

Hingerl. et al (2016) Int. J. of Greenhouse Gas Control. Vol 48, PP. 69-83. May 2016.

Changes to rock properties when in contact with CO2

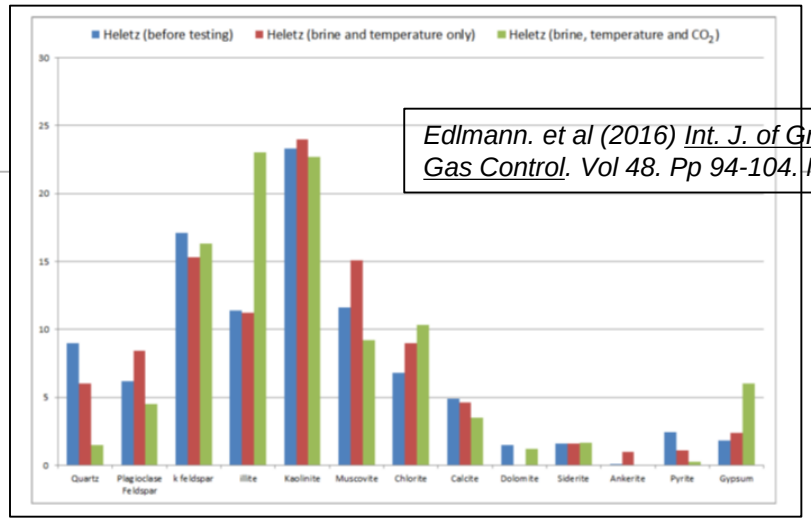

Edlmann. et al (2016) Int. J. of Greenhouse Gas Control. Vol 48. Pp 94-104. Ma y2016.

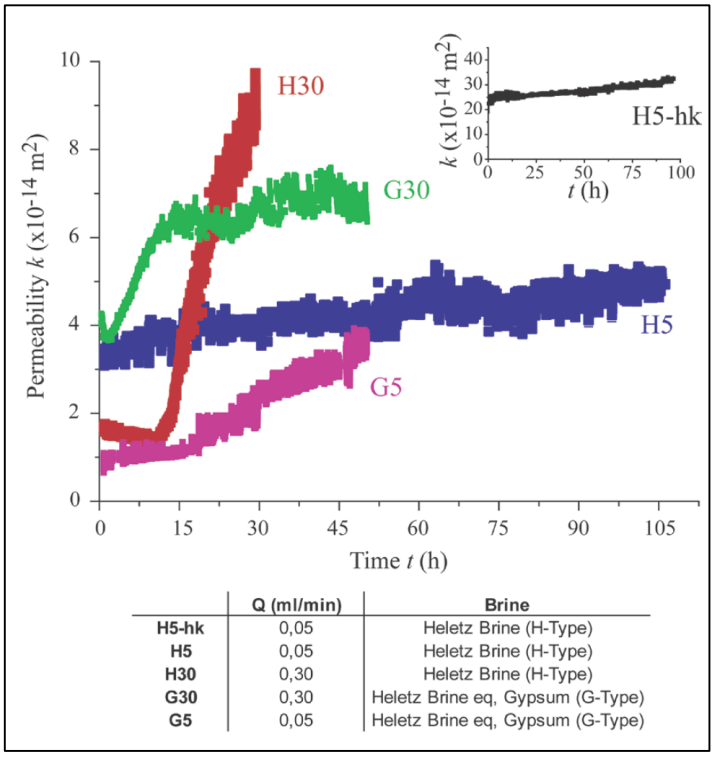

	Q (ml/min)	Brine
H5-hk	0,05	Heletz Brine (H-Type)
H5	0,05	Heletz Brine (H-Type)
H30	0,30	Heletz Brine (H-Type)
G30	0,30	Heletz Brine eq, Gypsum (G-Type)
G5	0,05	Heletz Brine eq, Gypsum (G-Type)

Caprock mineralogy before and after exposure to brine/CO2 (upper) and brine/CO2+SO2 (lower)

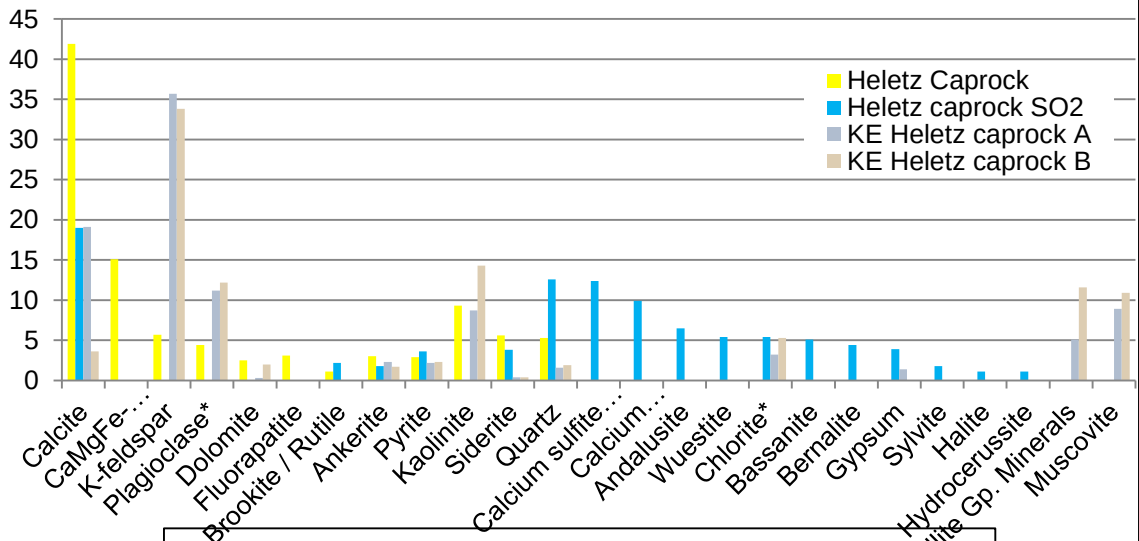

Wigston et al (2016) Effect of impurity gases on heletz Reservoir and Caprock Mineralogy. Manuscript in preparation

Reservoir permeability change when exposed to brine/CO2

Luguot et al (2016) Int. J. of Greenhouse Gas Control. Vol 48, Pp 44-58. May 2016

UPPSALA UNIVERSITET

Site characterization and site properties - summary

- A summary of the characterization in a ***Special Edition*** *of International Journal of Greenhouse Gas Control* **Niemi, Gouze, Bensabat (eds.);** Volume 48, Part 1, Pages 1-186, May, 2016 ***Characterization of formation properties for geological storage of CO_2 – Experiences from the Heletz CO_2 injection site and other example sites from the EU FP7 project MUSTANG***

- ***Overview article*** summarizing the site properties is given in

  Niemi, A. Bensabat, J, Shtivelman, V, Edlmann, K, Gouze, P., Luquot, L., Hingerl,F, Benson, S.M., Pezard, P.A, Rasmusson, K., Liang,T., Fagerlund, F., Gendler, M., Goldberg,I, Tatomir,A., Lange, T., Sauter, M., and Freifeld, B. (2016) ***Heletz experimental site overview, characterization and data analysis for CO2 injection and geological storage*** *Int. J. of Greenhouse Gas Control*. Vol 48; Pp 3-23. May 2016.

CO_2QUEST

UPPSALA UNIVERSITET

Niemi, Gouze, Bensabat (eds.)
Special Edition of International Journal of Greenhouse Gas Control Volume 48, Part 1, Pages 1-186 (May 2016)

Pezard et al.	Time-lapse downhole electrical resistivity monitoring of subsurface CO2 storage at the Maguelone shallow experimental site (Languedoc, France).
McDermott et al.	Experimental investigation and hybrid numerical analytical hydraulic mechanical simulation of supercritical CO2 flowing through a natural fracture in caprock.
Elhami et al.	Physical- and geomechanical properties of a drill core sample from 1.6 km depth at the Heletz site in Israel: some implications for reservoir rock and CO2 storage
Edlmann et al.	Mineralogical investigation of the caprock of the field scale experimental CO2 injection site, Heletz, and its reactivity to scCO2 injection
Tatomir et al.	An integrated core-based analysis for the characterization of flow, transport and mineralogical parameters of the Heletz pilot CO2 storage site reservoir
Soler-Sagarra et al.	Simulation of chemical reaction localization using a multi-porosity reactive transport approach
Hingerl et al.	Characterization of Heterogeneity in the Heletz Sandstone from Core to Pore Scale and Quantification of its Impact on Multi-Phase Flow
Niemi et al.	Heletz experimental site overview, characterization and data analysis for CO2 injection and geological storage
Abdoulghafouri et al.	Characterization and modeling of the alteration of fractured class-G Portland cement flowed by CO2-rich brine
Davila et al.	Efficiency of magnesium hydroxide as engineering seal in the geological sequestration of CO2
Davila et al.	Interaction between a fractured marl caprock and CO2-rich sulfate solution under supercritical CO2 conditions
Zhang et al.	A feasibility and efficiency study of seismic waveform inversion for time-lapse monitoring of onshore CO2 geological storage sites using reflection seismic acquisition geometries
Luquot et al.	CO2-rich brine percolation experiments through Heletz reservoir rock samples (Israel): Role of the flow rate and brine composition

Testing program (1/4)
Determine in-situ residual trapping parameters from push-pull experiment

injection-withdrawal of scCO2 and brine

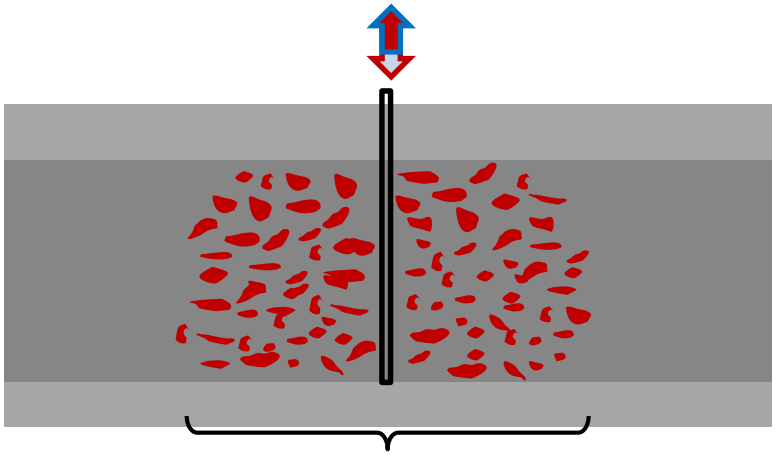

zone of residual trapped $scCO_2$

❑ Reduced influence of formation heterogeneity

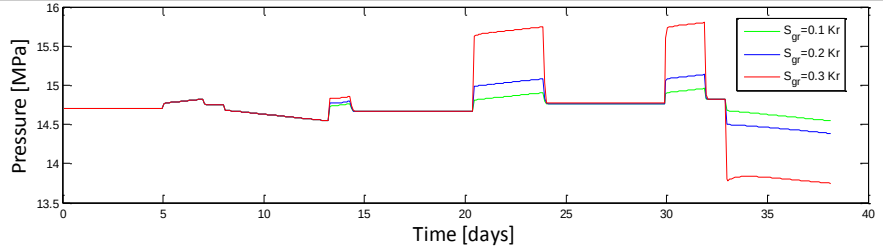

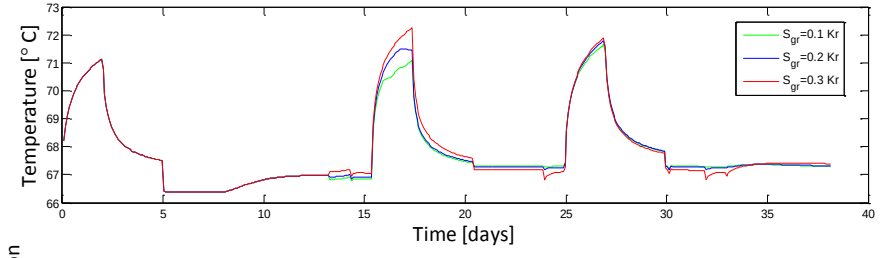

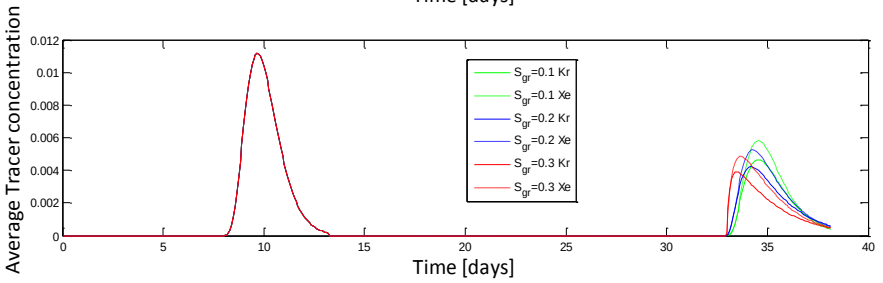

Rasmusson et al (2014) Analysis of alternative designs for push –pull …Int. J. of Greenhouse Gas Control. Vol 27, pp 155-168

❑ Hydraulic tests

❑ Thermal tests

❑ Tracer tests

residual trapping

Testing program (2/4)
Determine in-situ residual and dissolution trapping parameters

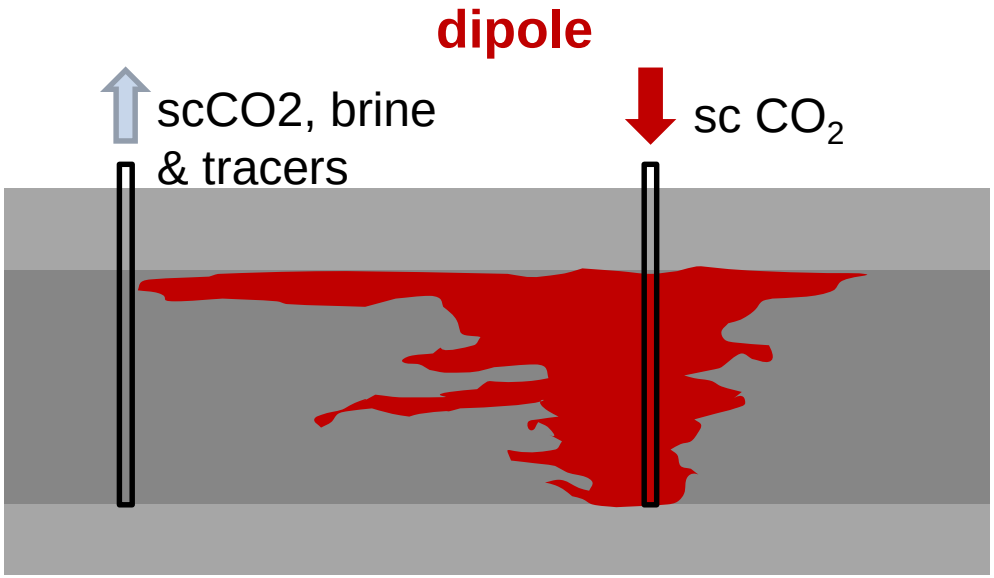

- Heterogeneity affects migration and trapping

- **During stable flow-field conditions, the abstracted dissolved CO2 directly reflects the total rate of CO2 dissolution**

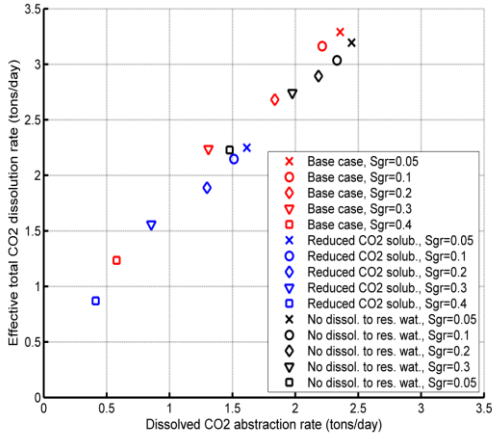

Fagerlund et al (2013) Design of two-well field test …Int. J. of Greenhouse Gas Control. 19 (2013) 642–651

- Hydraulic tests ⇒ residual trapping
- Thermal tests ⇒ residual trapping
- Tracer tests ⇒ residual & dissolution trapping

Testing program (3/4)
Determine enhanced trapping when altering CO2 and water injection schemes

UPPSALA UNIVERSITET

Injection schemes where water is added improve the trapping

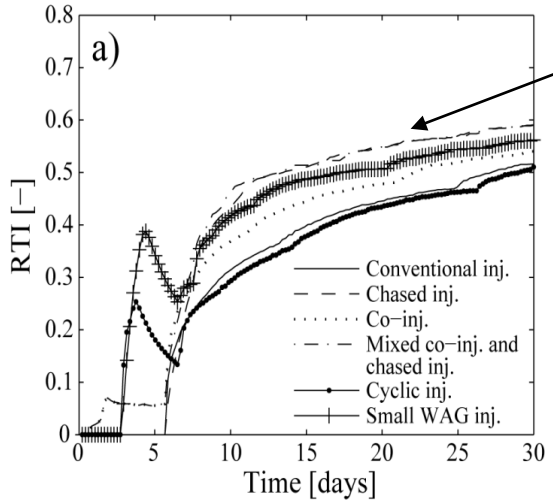

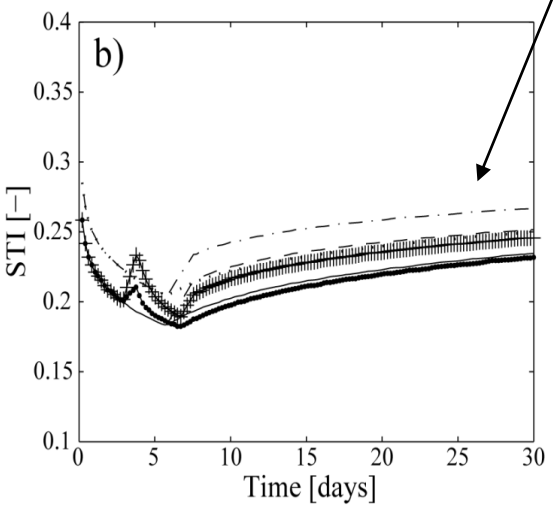

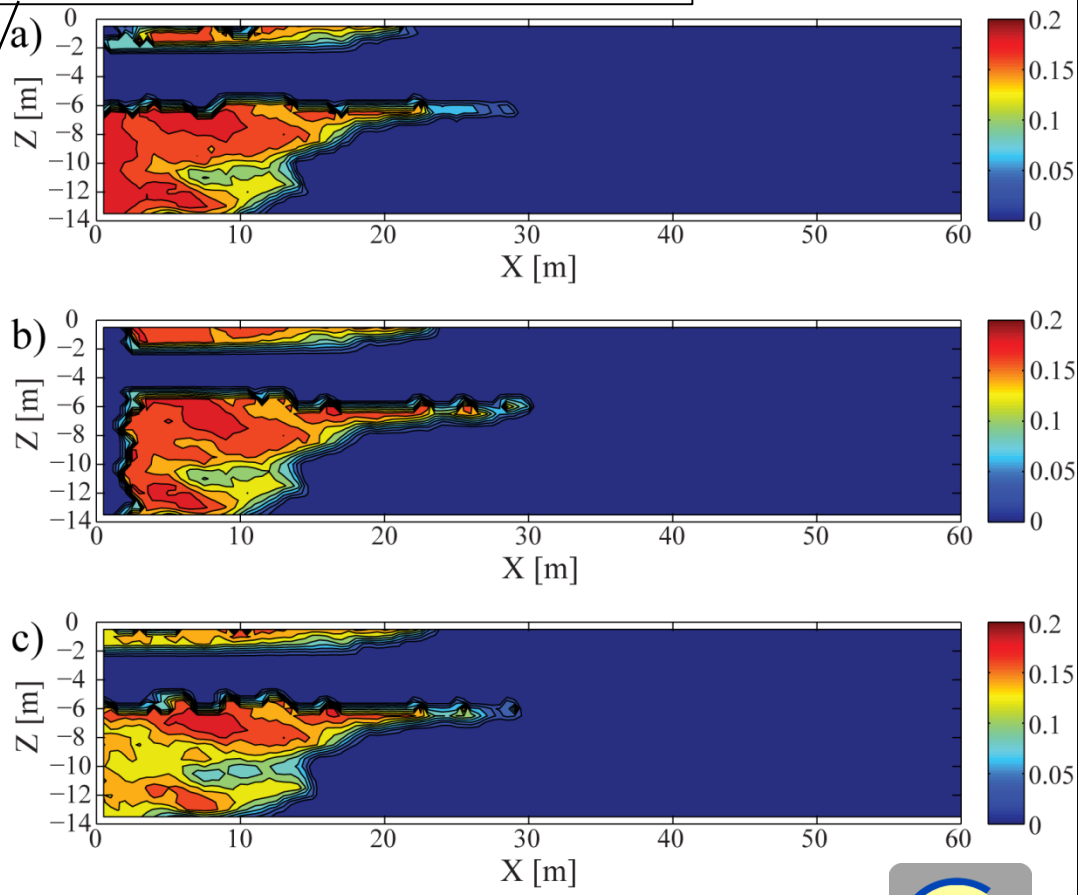

Rasmusson K. et al. (2016) "A simulation study of the effect of trapping model, geological heterogeneity and injection strategies on CO2 trapping *Int. J. of Greenhouse Gas Control. In press.*

Testing program (4/4)
Effect of impurity gases is CO2 stream

Use SO_2 and N_2 as impurity gases

- **Short injection- withdrawal test**

- SO2 effects will be chemical, N2 physical
- For comparison, laboratory experiments on rock cores are being carried out by CanMet, Canada

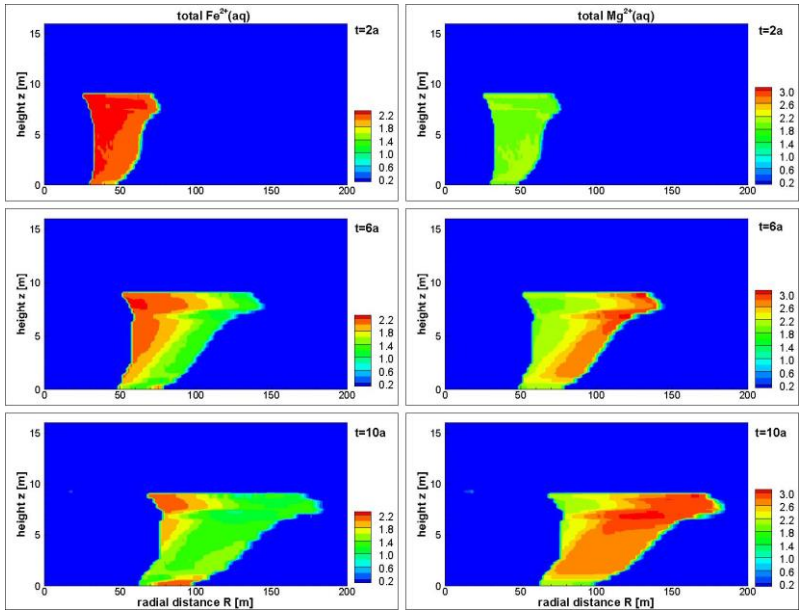

Wollf et al. (2016) Manuscript

Status - where are we now

- Sequence 1/4 was started in Nov 2015
- **U-tube sampling** system could not maintain the formation pressure **(serious leaks in the tubing)** -> the high pressure fluid samples would not have been representative ->

  replacement of the tubing was required

DTS temperature measurements show the low temperatures Indicative of gas pressure lowering due to gas leaks

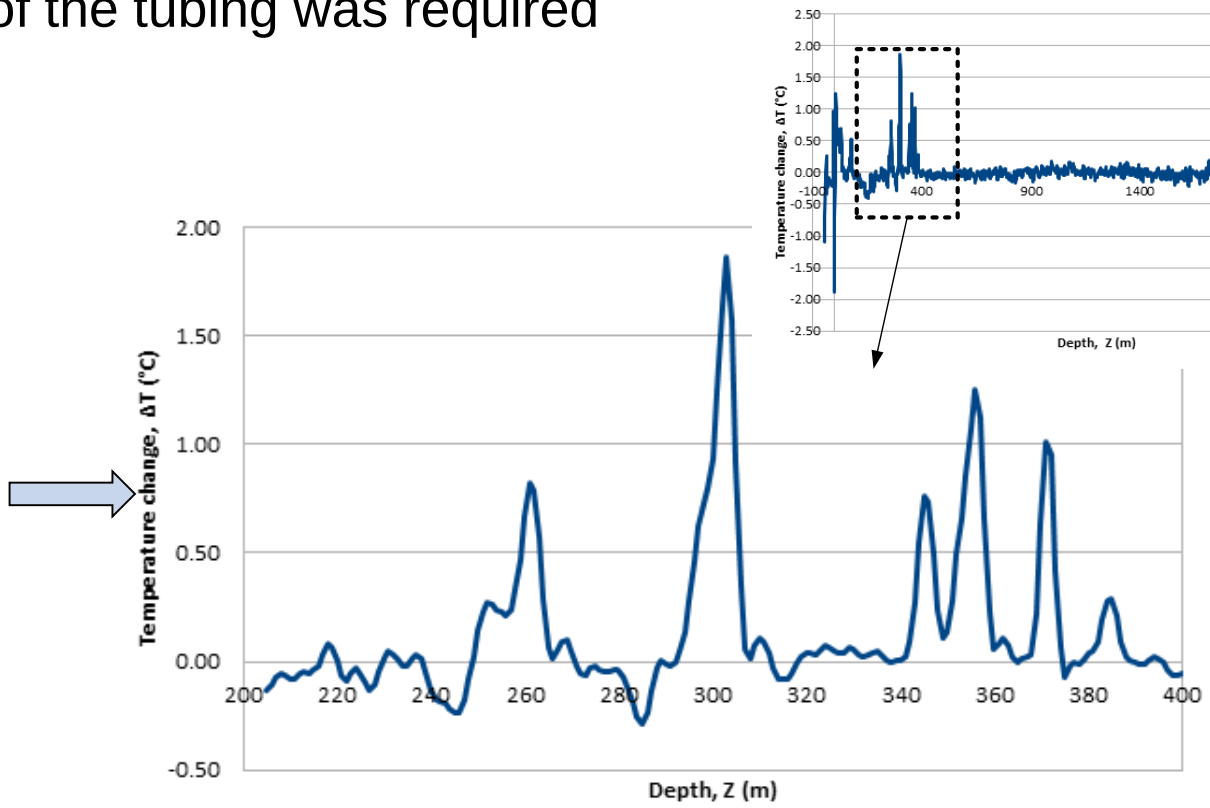

UPPSALA UNIVERSITET

EWRE

Status - where are we now

- **Replacement U-tubes have now been** constructed and **installed** in injection well, while in the monitoring well we need to lift out the equipment before the new ones can be installed
- Single-well **experiments ready to start**, two-well experiments to follow in the autumn

TRUST 2

CO_2QUEST

UPPSALA UNIVERSITET

EWRE

Especially acknowledged co-workers

Rona Ronen, EWRE
Dorothee Rebsher, BGR
Lennart Wolff, BGR
Vladimir Shtivelman, GII
Linda Luguot, CSIC
Philippe Gouze, CNRS
Philippe Pezard, CNRS
Katriona Edlmann, UEDIN
Fritjof Fagerlund, Uppsala
Kristina Rasmusson, Uppsala
Sally Benson, Stanford University
Ferdinand Hingerl, Stanford University
Maria Ask, LTH
Andrew Wigston, CanMet, Canada

and all MUSTANG, TRUST and CO2QUEST partners

MUSTANG CO_2

TRUST CO_2

CO_2QUEST

UPPSALA
UNIVERSITET

Thank you for your attention!

This research was supported by EU FP7 projects

MUSTANG (Grant Agreement 227286), TRUST(Grant Agreement 309067), PANACEA (Grant Agreement 282900) and CO2QUEST (Grant Agreement 309102)